

# Rexport

## Directional valves electro-hydraulically operated (new series)

RE 24751/12.2004

Size 10 to 32 up to 35 MPa up to 1100 L/min

**Features:**

- Valves used to control the start, stop and direction of a fluid flow
- Electro-hydraulic operation (WEH), hydraulic operation (WH)
- For subplate mounting
- Spring or pressure-centred, spring or hydraulic offset
- Wet-pin DC or AC solenoids, optional
- Manual override, optional
- Electrical connection as individual or central connection
- Shifting time adjustment, optional
- Pre-load valve in the P-channel of the main valve, optional
- Auxiliary equipment:
  - Stroke adjustment at main spool, optional
  - Stroke adjustment and/or end position indicator, optional
  - Mechanical or inductive limit switch (proximity type) at the main spool, optional
- Porting pattern to Din 24 340 form A, ISO 4401 and CETOP-RP 121H

**Instru**  
**Center**  
.com



## Pilot oil supply

4WEH - - - and 4WH - - -

The pilot oil supply is sourced externally via channel X from a separate circuit.

The pilot oil drain is led externally via channel Y to tank.

4WEH - - - E - - -

The pilot oil supply is sourced internally from channel P of the main valve.

The pilot oil drain is led externally via channel Y to tank. Port X in the subplate is plugged.

Change over from external to internal or from internal to external pilot oil supply (size 16): Remove the cover on the solenoid side "a", remove the plugs and turn end-for-end, insert plugs and re-place the cover.

4WEH - - - ET - - -

The pilot oil supply is sourced internally from channel P of the main valve.

The pilot oil drain is led internally via channel T to tank. Ports X and Y in the subplate are plugged.

4WEH - - - T - - -

The pilot oil supply is sourced externally via channel X from a separate circuit. The pilot oil drain is led internally via channel T to tank. Port Y in the subplate is plugged.

1 Plug screw M6-8.8 - pilot oil drain

2 Plug screws M6-8.8 - pilot oil supply

3 Plug screws M8-8.8 - for external sealing

Tightening torques  $M_s$  for cover fixing screws:

Size 16: 35 Nm

Size 25: 68 Nm

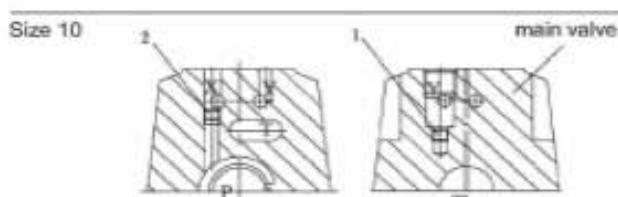
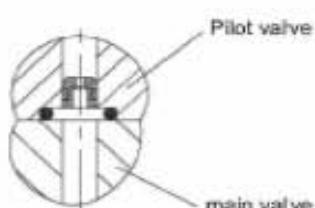
Tightening torque  $M_s$  for pilot valve fixing screws:

Sizes 10 to 32: 9 Nm

Throttle insert

The use of a throttle insert is required if the pilot oil supply in the P channel of the pilot valve is to be limited (see page 188).

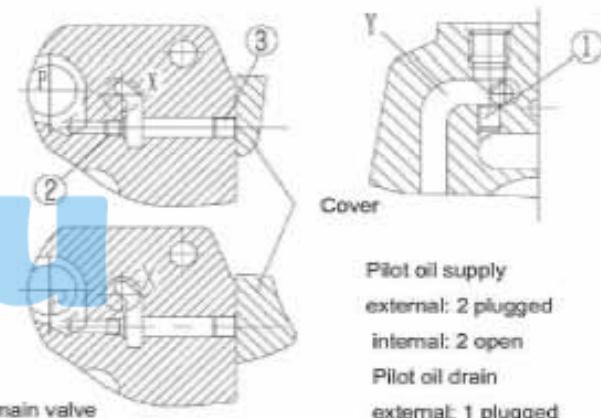
This throttle is inserted in the P channel of the pilot valve.



Pilot oil supply  
external: 2 plugged  
internal: 2 open

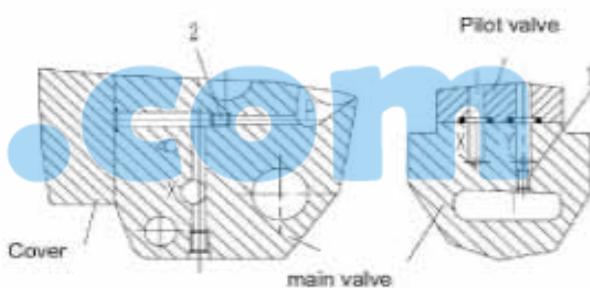
Pilot oil drain  
external: 1 plugged  
internal: 1 open

Size 16



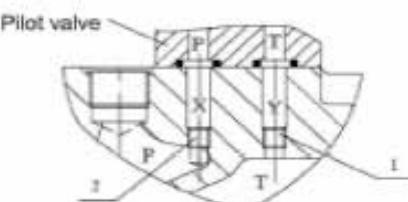
Pilot oil supply  
external: 2 plugged  
internal: 2 open  
  
Pilot oil drain  
external: 1 plugged  
internal: 1 open

Size 25

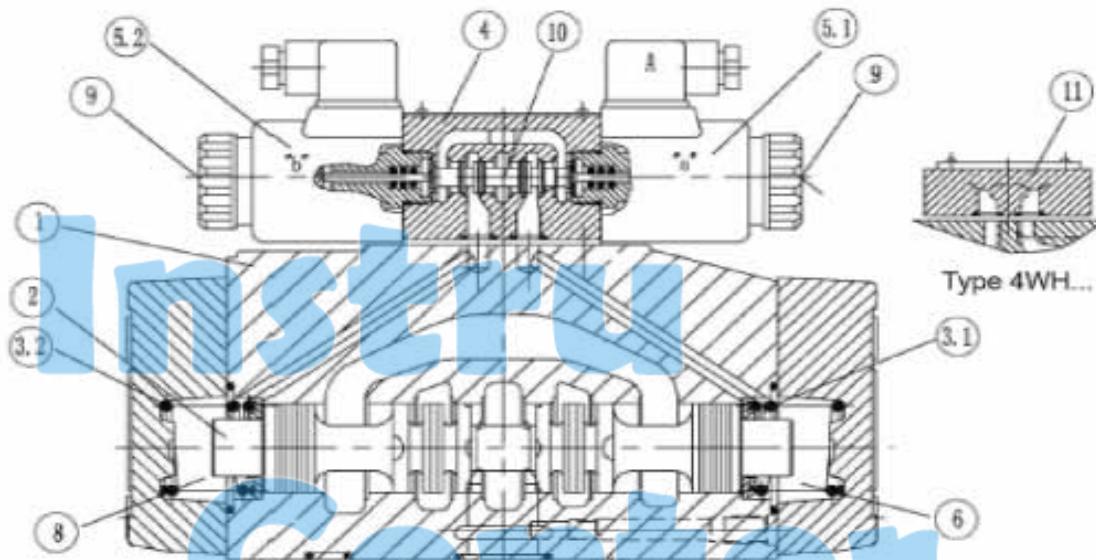


Pilot oil supply  
external: 2 plugged  
internal: 2 open  
  
Pilot oil drain  
external: 1 plugged  
internal: 1 open

Size 32



Pilot oil supply  
external: 2 plugged  
internal: 2 open  
  
Pilot oil drain  
external: 1 plugged  
internal: 1 open

**Functional,section**

Type 4WEH 16 ...

**Directional valves type 4WEH...**

Valves of type WEH are directional spool valves with electro-hydraulic operation.

They control the start, stop and direction of a fluid flow.

The directional valves basically consist of the main valve with housing (1), main control spool (2), one or two return springs (3.1) and (3.2), and the pilot valve (4) with one or two solenoids "a" (5.1) and/or "b" (5.2).

The main control spool (2) in the main valve is held in the neutral or in the initial position either by the springs or by means of pressure.

In the initial position, the two spring chambers (6) and (8) are connected to the tank without pressure via the pilot valve (4). The pilot valve is supplied with pilot fluid via the pilot line. The pilot oil supply can be either internal or external (external via port X).

When the pilot valve is operated, e.g. solenoid "a", the pilot spool (10) is shifted to the left and thus spring chamber (8) is pressurized with pilot pressure. Spring chamber (6) remains un-pressurized.

The pilot pressure acts on the left side of the main control spool (2) and pushes it against the spring (3.1). As a consequence, the ports P to B and A to T are connected in the main valve.

When the solenoid is de-energized, the pilot spool returns to its initial position (exception: detented spool). The spring chamber (8) is unloaded to tank.

The pilot oil is expelled from the spring chamber via the pilot valve into the Y channel.

The pilot oil supply and drain are internal or external (external via port Y).

An optional manual override (9) permits pilot spool (10) to be operated without energizing the solenoid.

**Directional valves type 4WH...**

Valves of type WH are directional spool valves with hydraulic operation.

They control the start, stop and direction of a fluid flow.

The directional valves basically consist of the valve housing (1), the main control spool (2), one or two return springs (3.1) and (3.2) in the case of valves with spring return or spring centring, and the pilot connecting plate (11).

The control spool (2) is operated directly by means hydraulic pressure.

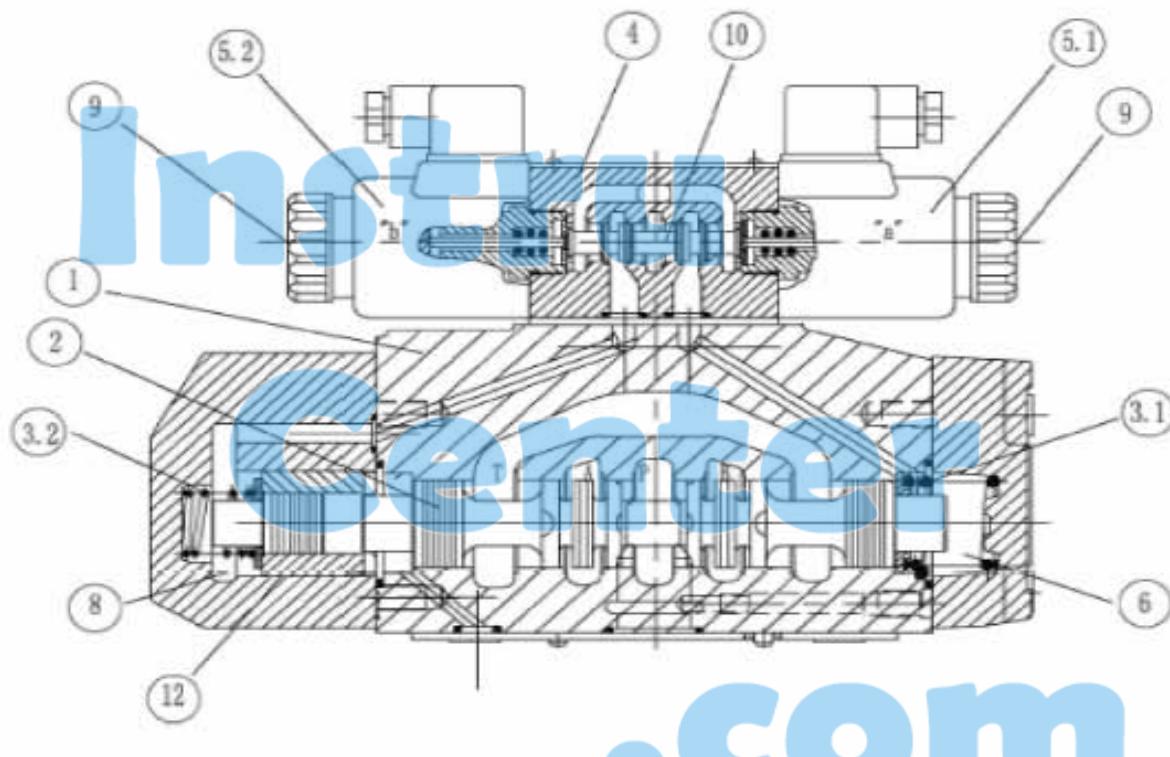
The control spool (2) is held in the neutral or in the initial position either by springs or by means of pressure. Pilot oil supply and pilot oil drain are external (see page 2).

**4/3-way directional valve with spring centring of the control spool**

In this model, the main control spool (2) is held in the neutral position by two return springs (3.1) and (3.2). The two spring chambers (6) and (8) are connected to ports X and Y via the connector plate (11).

When one of the two ends of the main control spool (2) is pressurized with pilot pressure, the spool is moved to the shifted position. The required ports in the valve are then opened to flow.

When the pilot pressure is removed, the spring on the opposite side to the pressurized spool area causes the spool to return to its neutral or initial position.

**Functional,section**

Type 4WEH 16 H...

**4/3-way directional valve with pressure centring of the main control spool, type 4WEH...H**

The main control spool (2) in the main valve is held in the neutral position by pressurization of the two front faces. A centring sleeve (12) is supported in the housing and holds the spool in position.

By removing the pressure from one of the spool ends, the main control spool (2) is moved to the shifted position.

The unloaded spool area displaces the returning pilot oil via the pilot valve into the Y channel (external).

**Shifting time adjustment, pressure reducing valve, pre-load valve****Shifting time adjustment**

In order to influence the shifting time of the main valve (1) a double throttle check valve(12) is installed.

Change over from meter-in (13) to meter-out control (14): Remove the pilot valve 4 (leave the O-ring support plate (15) in place), rotate the throttle check valve (12) about its longitudinal axis and refit it, replace the pilot valve (4).

Tightening torque for screws (16)

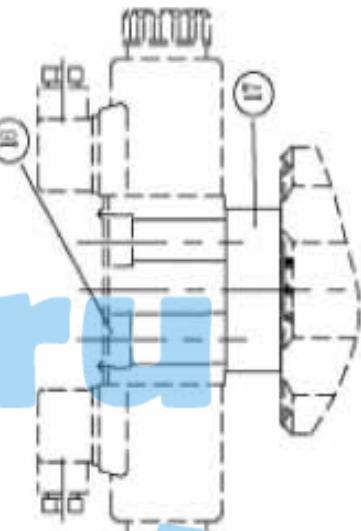
$M_A = 9 \text{ Nm.}$

**Pressure reducing valve "D3"**

The pressure reducing valve (17) must be used if the pilot pressure is higher than 25 MPa. Thus, the secondary pressure is held constant at 4.5 MPa. When using a pressure reducing valve "D3" (17), a throttle insert "B10" must be installed in the P channel of the pilot valve.

Tightening torque for screws (16)  $M_A = 9 \text{ Nm.}$

Type 4WEH..60/...S or S2



Type 4WEH..60/...J.D3

The pressure difference of the pre-load valve must be added to the pressure difference of the main valve (see characteristic curve) in order to determine the actual value.

The cracking pressure of this valve is approx. 0.45 MPa.








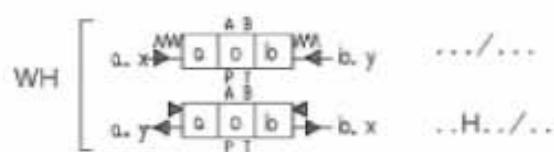

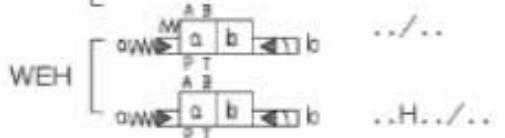

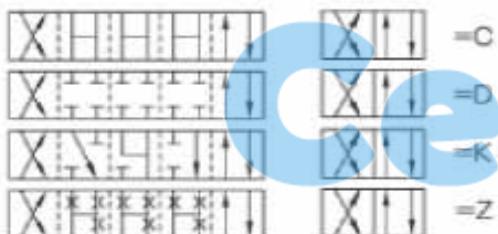
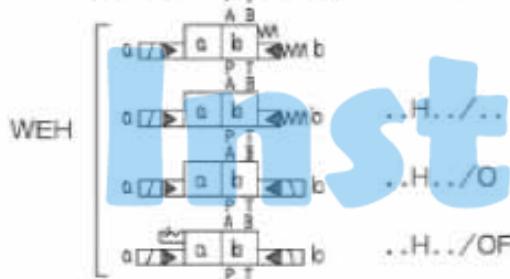
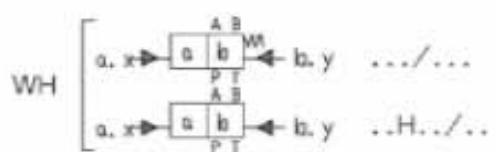
$\Delta p/qv$  characteristic curve (measured at  $v = 41 \text{ mm}^2/\text{s}$  and  $t = 50^\circ\text{C}$ )



1 Size 16  
2 Size 25  
3 Size 32.

**Ordering code**

4	/	/	*	Further details in clear text
pressure of operation				No code = mineral oils V = phosphate ester
Up to 28 MPa = No code				
Up to 35 MPa = H -				
4-way design	= 4			No code = Without pressure reducing valve D3 <sup>(1)</sup> = With pressure reducing valve
Types of operation				
Electro-hydraulic	= WEH			
Hydraulic	= WH			
Size				Pre-load valve (not for size 10) No code = Without pre-load valve P 4.5 = With pre-load valve
Size 10	= 10			
Size 16	= 16			
Size 25	= 25			
Size 32	= 32			
Spool return				No code = Without throttle insert B08 = Throttle Ø 0.8 mm B10 = Throttle Ø 1.0 mm B12 = Throttle Ø 1.2 mm B15 = Throttle Ø 1.5 mm
By means of springs	= No code			
Hydraulic	= H			
For symbols, see page 189				Additional equipment NO. (see Additional equipment.)
Series 40 to 49 (size 10) <sup>(2)</sup>	= 40			
Series 60 to 69 (sizes 16, 25, 32) <sup>(3)</sup>	= 60			
Spool return in the pilot valve for 2-position valve and 2 solenoids only possible with spools C, D, K, Z and hydraulic spool return in the main valve:				
Without spring return	= O			No code = Without shifting time adjustment
Without spring return with detent	= OF			S = Shifting time adjustment as meter-in control
Pilot valve with wet-pin solenoids				S2 = Shifting time adjustment as meter-out control
Standard valve	= A			
High-performance valve	= E			
12 V DC	= G12			No code = Pilot oil supply external, drain external
220 V AC 50 Hz	= W220-50			E = Pilot oil supply internal, drain external
24 V DC	= G24			ET <sup>(4)</sup> = Pilot oil supply internal, drain internal
DC solinoid commuting automatically	= W220R			T = Pilot oil supply external, drain internal
1) Unchanged installation and connection dimensions				Type 4WH... only available as No code!
2) Only in conjunction with throttle insert "B10"				Versions ET and T as 3-position valve with pressure centring only possible if $p_{pilot} > 2 \times p_{valve} + p_{drain}$ !
3) With internal pilot oil supply:				
Minimum pilot pressure: Please note page 192!				
				In order to avoid excessive pressure peaks, a throttle insert (B10) should be provided in the P port of the pilot valve.
				4) Plug-in connectors have to be ordered separately

**Symbols**

- 1) Example: Spool E, solenoid on side "a"  
Order example:  
H-4WEH 16 HEA60/6AG24N9ETSK4..B10..V..

- 2) Spool S only for size 16

**Valve opening in neutral position for spools Q, V and W**

Spool	Size	Valve opening in neutral position (in mm <sup>2</sup> )			
		10	16	25 (type 4W.H 25.60B/...)	32
Q	P-A	-	-	-	-
	P-B	-	-	-	-
	A-T	13	32	83	78
	B-T	13	32	83	78
V	P-A	13	32	83	73
	P-B	13	32	83	73
	A-T	13	32	83	84
	B-T	13	32	83	84
W	P-A	-	-	-	-
	P-B	-	-	-	-
	A-T	2.4	6	14	20
	B-T	2.4	6	14	20

**Detailed and simplified symbols for 3-position valves**

Valve with spring-centred neutral position		Valve with pressure-centred neutral position only sizes 16, 25 (type 4W.H 25.60/... and 32)	
X = external; Y = external	 <b>Type 4WEH..../..</b>	 <b>Type 4WEH..H.J..</b>	
X = internal; Y = external	 <b>Type 4WEH../.E..</b>	 <b>Type 4WEH..H.J.E..</b>	
X = internal; Y = internal	 <b>Type 4WEH../.ET..</b>		3-position valves, pressure-centred, preferably with external pilot oil supply and/or drain (No code, E) For the preconditions for internal pilot oil supply and/or drain (E1, 1) see page 188 or 192.
X = external; Y = internal	 <b>Type 4WEH../.T..</b>		

**Detailed and simplified symbols for 2-position valves**

Valves with spring offset		Valves with hydraulic offset			
X = external; Y = external	Type 4WEH.../...	Type 4WEH..H.../...	Type 4WEH..H/O...	Type 4WEH..H/OF...	
X = internal; Y = external	Type 4WEH.../...E...	Type 4WEH..H.../...E...	Type 4WEH..H/O.../E...	Type 4WEH..H/OF.../E...	
X = internal; Y = internal	Type 4WEH.../...ET...	Type 4WEH..H.../...ET...	Type 4WEH..H/O.../ET...	Type 4WEH..H/OF.../ET...	
X = external; Y = internal	Type 4WEH.../...T...	Type 4WEH..H.../...T...	Type 4WEH..H/O.../T...	Type 4WEH..H/OF.../T...	

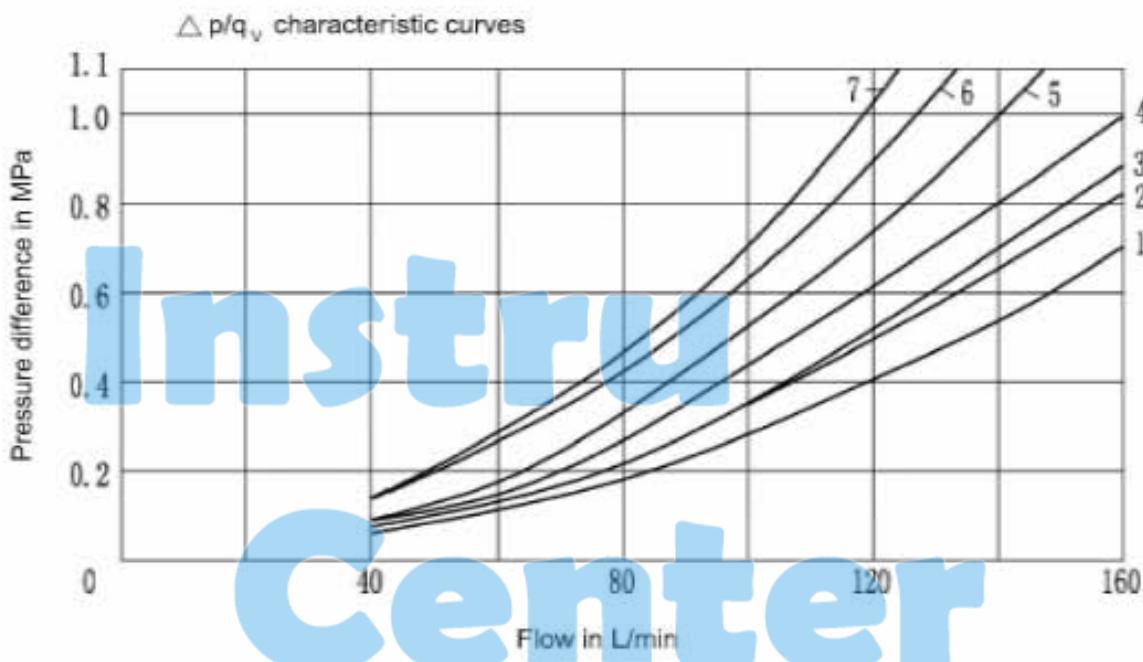
**Technical data** (For applications outside these parameters, please consult us!)

Sizes (ordering code)		10	16	25	32
Operating pressure, max. Type 4WEH	(MPa)	28	28	28	28
- Port P, A, B	Type H-4WEH	(MPa)	35	35	35
- Port T	Pilot oil drain Y external	(MPa)	31.5 <sup>b</sup>	25	25
	Pilot oil drain Y internal <sup>c</sup>			16 <sup>d</sup> /21 <sup>e</sup> DC 10 <sup>d</sup> /16 <sup>e</sup> AC	
- Port Y	- DC	(MPa)			16 <sup>d</sup> /21 <sup>e</sup> DC
Pilot oil drain external:	- AC	(MPa)			10 <sup>d</sup> /16 <sup>e</sup> AC
	with version 4WH	(MPa)			25
Pilot pressure, max.	(MPa)				25
(With higher pilot pressures, a pressure reducing valve is required.)					
Pilot pressure, min.					
- Pilot oil supply X external, pilot oil supply X internal					H-4W....
(not with spools: C, F, G, H, P, T, V, Z, S <sup>f</sup> )					
3-position valve, spring-centred	(MPa)	1.0	1.4	1.3	0.85
3-position valve, pressure-centred	(MPa)	-	1.4	1.8	0.85
2-position valve, with spring offset	(MPa)	1.0	1.4	1.3	1.0
2-position valve, with hydraulic offset	(MPa)	0.7	1.4	0.8	0.5
- pilot oil supply X internal					
(with spools C, F, G, H, P, T, V, Z, S <sup>f</sup> )	(MPa)	4.5 <sup>g</sup>	4.5 <sup>h</sup>	4.5 <sup>i</sup>	4.5 <sup>j</sup>
1) As 3-position valve with spring-centring only possible if $p_{\text{pilot}} > 2 \times p_{\text{max.}} + p_{\text{pilot max.}}$					minimum pressure difference of 0.65 MPa from P to T.
2) Spool S only for size 16					4) For spools C, F, G, H, P, T, V, Z, S (by means of a pre-load valve or a sufficiently large flow)
3) For symbols C, F, G, H, P, T, V, Z internal pilot oil supply is only possible, if the flow from P to T in the neutral position (in a 3-position valve) or when the valve is moving through the neutral position (in a 2-position valve) is large enough to ensure a					5) Type 4WEH 10...28 MPa Type H-4WEH 10...31.5 MPa
					6) Standard valve "6A" 7) High-performance valve "6E"
Hydraulic fluid					Mineral oil (for NBR seal) or Phosphate ester (for FPM seal)
Fluid temperature range	(°C)				- 30 to + 80
Viscosity range	(mm <sup>2</sup> /s)				2.8 to 500
Cleanliness					Maximum permissible degree of contamination of the hydraulic fluid to NAS 1638 class 9. We therefore recommend a filter with a minimum retention rate of $\beta_{\text{v}} > 75$ .
Pilot oil volume for shifting operation :					
- 3-position valve, spring-centred	(cm <sup>3</sup> )	2.04	5.72	14.2	29.4
- 2-position valve	(cm <sup>3</sup> )	4.08	11.75	28.4	58.8
- 3-position valve, pressure-centred			WH WEH	WH WEH	WH WEH
From neutral position to shifted position "a"	(cm <sup>3</sup> )		2.83 2.83	7.15 7.15	14.4 14.4
From shifted position "a" to neutral position	(cm <sup>3</sup> )		2.9 5.73	14.18 7.0	29.4 15.1
From neutral position to shifted position "b"	(cm <sup>3</sup> )		5.72 5.73	14.18 14.15	29.4 29.4
From shifted position "b" to neutral position	(cm <sup>3</sup> )		2.83 8.55	19.88 5.73	43.8 14.4
Pilot oil flow for shortest shifting time	(L/min)	approx.35	approx.35	approx.35	approx.45.0
weight	Valve with one solenoid	(kg)	approx.6.4	approx.8.5	approx.17.6
	Valve with two solenoids, spring-centred	(kg)	approx.6.8	approx.8.9	approx.18.0
	Valve with two solenoids, pressure-centred	(kg)	approx.6.8	approx.8.9	approx.19.0
	Valve with hydraulic operation (4WH...)	(kg)	approx.5.5	approx.7.3	approx.16.5
	Shifting time adjustment	(kg)		approx.0.8	
	Pressure reducing valve	(kg)		approx.0.4	
Installation position					optional; valve with hydraulic spool return "H"(spools C, D, K, Z, Y) horizontal

**Shifting times**

Shifting time = Contacting at the pilot valve up to start of opening of the control land in the main valve

Size 10 Pilot valve series 60/A	Shifting time of the valve from neutral position to shifted position with AC (-) and DC (=) operation									
	at pilot pressure	(MPa)	~7=	~14=	~21=	~25=				
	- 3-position valve	(ms)	30	65	25	60	20	55	15	50
	- 2-position valve	(ms)	35	80	30	75	25	70	20	65
	Shifting time of the valve from shifted position to neutral position									
	- 3-position valve	(ms)			30					
	- 2-position valve	(ms)	35	40	30	75	25	30	20	25
	Shifting time of the valve from neutral position to shifted position with AC (-) and DC (=) operation									
	at pilot pressure	(MPa)	~7=	~14=	~21=	~25=				
	- 3-position valve, spring-centred	(ms)	25...30	40	25...30	40	25...30	40	20...25	40
Size 16 Pilot valve series 60/E	- 2-position valve	(ms)	30...35	55	30...35	55	30...35	55	25...30	50
	- 3-position valve	Solenoid operated	a	b	a	b	a	b	a	b
	pressure-centred	(ms)	30	30	40	40	30	30	35	40
	Shifting time of the valve from shifted position to neutral position									
	- 3-position valve	(ms)	20 to 35 for - , 30 for =							
	- 2-position valve	(ms)	35...50	45	35...50	45	30...45	40	30...45	35
	- 3-position valve	from -	a	b	a	b	a	b	a	b
	pressure-centred	(ms)	20...35	20	20...35	20	20...35	20	20...35	20
	Shifting time of the valve from neutral position to shifted position with AC (-) and DC (=) operation									
	at pilot pressure	(MPa)	~7=	~14=	~21=	~25=				
Size 25 (4W, H 25...60)	- 3-position valve, spring-centred	(ms)	50	85	40	75	35	70	30	65
	- 2-position valve	(ms)	120	160	100	130	85	120	70	105
	- 3-position valve	Solenoid operated	a	b	a	b	a	b	a	b
	pressure-centred	(ms)	30	35	55	65	30	35	55	60
	Shifting time of the valve from shifted position to neutral position									
	- 3-position valve	(ms)	40 to 55 for - , 40 for =							
	- 2-position valve	(ms)	120	125	85	100	85	90	75	80
	- 3-position valve	from -	a	b	a	b	a	b	a	b
	pressure-centred	(ms)	30...50	30	35	30...50	30	50	30...50	30
	Shifting time of the valve from neutral position to shifted position with AC (-) and DC (=) operation									
Size 32 Pilot valve series 50/A	at pilot pressure	(MPa)	~5=	~15=	~25=					
	- 3-position valve, spring-centred	(ms)	65	80	50	90	35	60		
	- 2-position valve	(ms)	100	130	75	100	60	80		
	- 3-position valve	Solenoid operated	a	b	a	b	a	b	a	b
	pressure-centred	(ms)	55	60	100	105	40	45	85	95
	Shifting time of the valve from shifted position to neutral position									
	- 3-position valve	(ms)	60 to 75 for - , 50 for =							
	- 2-position valve	(ms)	115...130	90	85...100	70	65...80	65		
	- 3-position valve	from -	a	b	a	b	a	b	a	b
	pressure-centred	(ms)	30...65	30	40	60...90	30	30	105...155	50

**Characteristic curves: Type 4WEH 10...(measured at  $v = 41 \text{ mm}^2/\text{s}$  and  $t = 50^\circ\text{C}$  )**

Spool	Shifted position				Spool	Neutral position		
	P-A	P-B	A-T	B-T		A-T	B-T	P-T
E,D,Y2	2	4	5		F	-	6	
F	1	4	1	4	G,T	-	-	7
G,T	4	2	2	6	H	1	3	5
H,C	4	4	1	4	L	3	-	-
J,K	1	2	1	3	M	-	7	5
L	2		3	1	P	-	4	-
M	4	4	3	4	Q,V,W,Z			
Q,V,W,Z	2	2	3	5	R			
R	2	2	3	-	U			
U	3	3	3	4	P			
P	4	1	3	4				

**Shifting performance limits: Type 4WEH 10...(measured at  $v = 41 \text{ mm}^2/\text{s}$  and  $t = 50^\circ\text{C}$  )**

2 and 3-position valves (Permissible flow $q_v$ in L/min)			
Spool	Operating pressure $p_{\text{op}}$ in MPa		
	20	25	31.5
E, J, L, M, Q, R, U, V, W, C, D, K, Z, Y	160		
H	160	150	120
G, T	160	160	140
F, P	160	140	120

General:

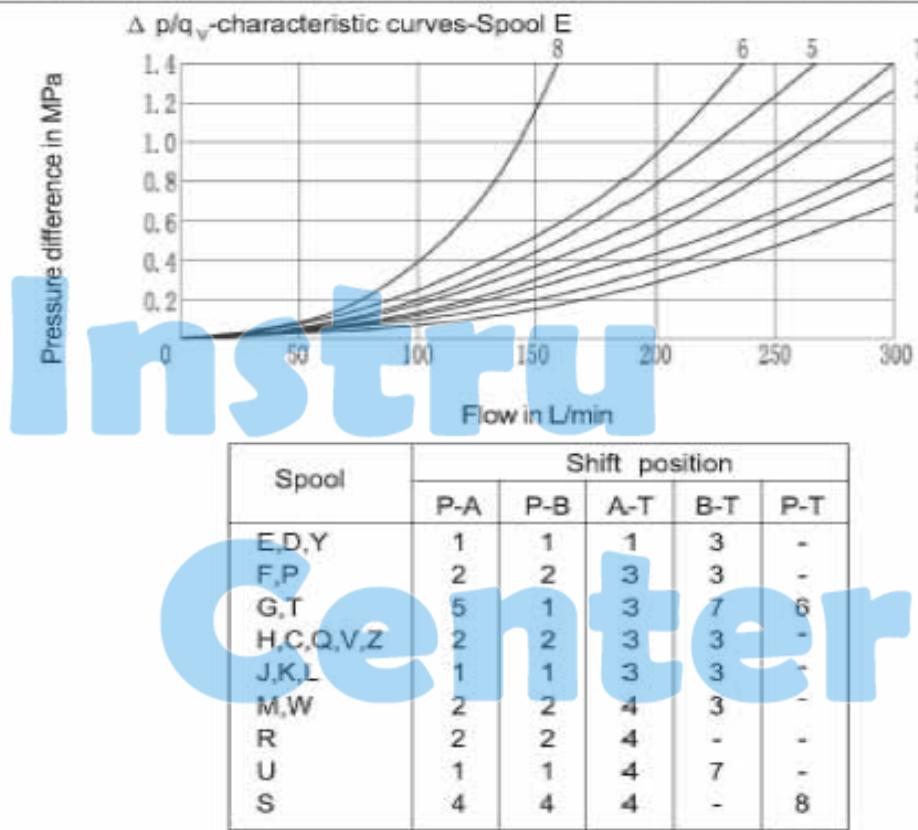
Attention!

The shifting performance limits shown are valid for applications with two directions of flow (e.g. from P to A and simultaneous return flow from B to T).

As a result of the flow forces occurring within the valve with only one direction of flow (e.g. from P to A with port B blocked) the permissible performance limits may be considerably lower!

(In the case of applications of this kind, please consult us.)

The performance limits were determined with the solenoid at operating temperature, 10% undervoltage and with no tank pre-loading.

**Characteristic curves: Type 4WEH 16...(measured at  $v = 41 \text{ mm}^2/\text{s}$  and  $t = 50^\circ\text{C}$ )****Performance limits: Type 4WEH 16...(measured at  $v = 41 \text{ mm}^2/\text{s}$  and  $t = 50^\circ\text{C}$ )**

2-position valves Permissible flow $q_v$ in L/min						Pre-load valve, required for X = internal	
Spool	Operating pressure $p_{max}$ in MPa						
	7	14	21	28	35		
with spring offset in the main valve <sup>1)</sup>							
C, D, K, Z, Y	300	300	300	300	300		
with spring offset in the main valve <sup>2)</sup>							
C	300	300	300	300	300	Spool C and Z up to approx. 160L/min	
D, Y	300	270	260	250	230		
K	300	250	240	230	210		
Z	300	260	190	180	160		
with hydraulic offset in the main valve							
HC, HD, HK	300	300	300	300	300	Spool HC and HZ up to approx. 160L/min	
HZ, HY	300	300	300	300	300		

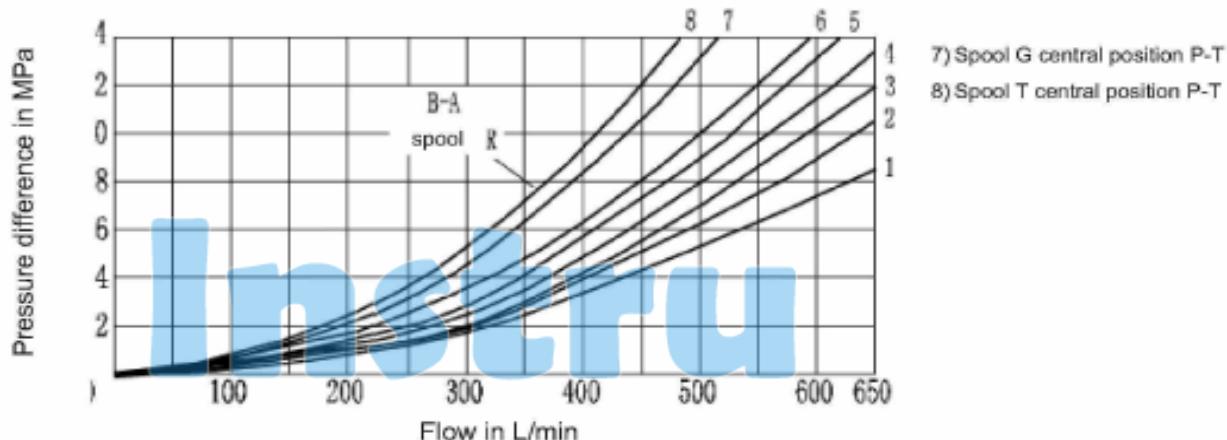
3-position valves Permissible flow $q_v$ in L/min						Pre-load valve, required for X = internal		
Spool	Operating pressure $p_{max}$ in MPa							
	7	14	21	28	35			
spring-centred								
E, H, J, L, M, QUWR	300	300	300	300	300			
F, P	300	250	180	170	150	Spools F, G, H, P and S in general		
G, T	300	300	240	210	190			
S	300	300	300	250	220			
V	300	250	210	200	180	Spool V up to ca. 160 L/min		
pressure-centred (at min. pilot pressure of 1.6 MPa)								
for all spools	300	300	300	300	300			

**Attention!**

When using 4/3-way directional valves with spring-centring of the control spool in the main valve, which exceeds the given performance limits, a higher pilot pressure is required.

Example: At an operating pressure of  $p_{max} = 35 \text{ MPa}$  and a flow of  $q_v = 300 \text{ L/min}$ , a pilot pressure of 1.6 MPa is required. The maximum flow for those valves is therefore only dependent on the  $\Delta p$  value which is acceptable for the system.

- 1) The flow values given are achieved when the minimum pilot pressure of 1.2 MPa is present.
- 2) The flow values given are limiting values at which the return spring can return the valve when the pilot pressure fails.

**Characteristic curves: Type 4WEH 25...(measured at  $v = 41 \text{ mm}^2/\text{s}$  and  $t = 50^\circ\text{C}$ )**

Spool	Shifted position				Spool	Neutral position			
	P-A	P-B	A-T	B-T		P-A	P-B	A-T	B-T
E	1	1	1	3	P	4	1	1	5
F	1	4	3	3	Q	2	2	3	5
G	3	1	2	4	R	2	1	1	-
H	4	4	3	4	U	2	1	1	6
J	2	2	3	5	V	4	4	3	6
L	2	2	3	3	W	1	1	1	3
M	4	4	1	4	T	3	1	2	4

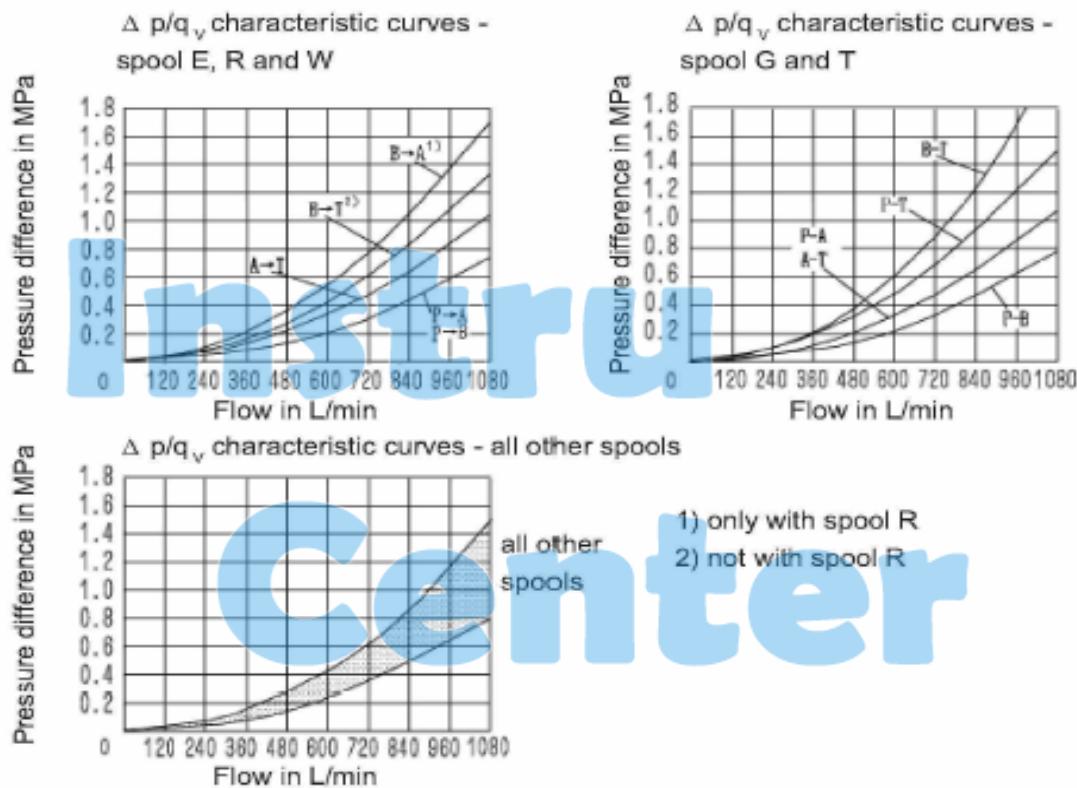
**Performance limits: Type 4WEH 25...(measured at  $v = 41 \text{ mm}^2/\text{s}$  and  $t = 50^\circ\text{C}$ )**

2-position valves Permissible flow $q_v$ in L/min					Pre-load valve, required for X = internal	
Spool	Operating pressure $\Delta p$ in MPa					
	7	14	21	28	35	
with spring offset in the main valve <sup>1)</sup>						
C, D, K, Z, Y	700	700	700	700	650	Spool C and Z up to approx. 180 L/min
with spring offset in the main valve <sup>2)</sup>						
C	700	700	700	700	700	
D, Y	700	650	400	350	300	
K	700	650	420	370	320	
Z	700	700	650	480	400	
with hydraulic offset in the main valve						
HC, HD, HK	700	700	700	700	700	
HZ, HY	700	700	700	700	700	
HC../O	700	700	700	700	700	
HD../O	700	700	700	700	700	
HK../O	700	700	700	700	700	
HZ../O	700	700	700	700	700	
HC../OF	700	700	700	700	700	
HD../OF	700	700	700	700	700	
HK../OF	700	700	700	700	700	
HZ../OF	700	700	700	700	700	

3-position valves Permissible flow $q_v$ in L/min					Pre-load valve, required for X = internal	
Spool	Operating pressure $\Delta p$ in MPa					
	7	14	21	28	35	
spring-centred						
E, L, M, Q, U, W	700	700	700	700	650	Spools F, G, H, P and T in general, spool V up to approx. 180 L/min
G, T	400	400	400	400	400	
F	650	550	430	330	300	
H	700	650	550	400	360	
J	700	700	650	600	520	
P	650	550	430	330	300	
V	650	550	400	350	310	
R	700	700	700	650	580	
pressure-centred (at min. pilot pressure of 1.8MPa)						
E, F, H, J	700	700	700	700	650	
L, M, P, Q	700	700	700	700	650	
R, U, V, W	700	700	700	700	650	
G, T	700	700	700	700	400	
at > 3MPa pilot pressure						
G, T	700	700	700	700	700	

1) The flow values given are achieved when the minimum pilot pressure of 1.3 MPa is present.

2) The flow values given are limiting values at which the return spring can return the valve when the pilot pressure fails.

**Characteristic curves: Type WEH 32...(measured at  $v = 41 \text{ mm}^2/\text{s}$  and  $t = 50^\circ\text{C}$ )****Performance limits: Type WEH 32...(measured at  $v = 41 \text{ mm}^2/\text{s}$  and  $t = 50^\circ\text{C}$ )**

2-position valves Permissible flow $q_v$ in L/min						Pre-load valve, required for $X =$ internal		
Spool	Operating pressure $p_{max}$ in MPa							
	7	14	21	28	35			
with spring offset in the main valve <sup>1)</sup>								
C, D, K, Z, Y	1100	1040	860	750	680	spool C in general, spool Z up to approx. 180 L/min		
with spring offset in the main valve <sup>2)</sup>								
C	1100	1040	860	800	700			
D, Y	1100	1040	540	480	420			
K	1100	1040	860	500	450	spool C in general, spool Z up to approx. 180 L/min		
Z	1100	1040	860	700	650			
with hydraulic offset in the main valve								
HC, HD, HK	1100	1040	860	750	680			
HZ, HY	1100	1040	860	750	680			

- 1) The flow values given are achieved when the minimum pilot pressure of 1MPa is present.
- 2) The flow values given are limiting values at which the return spring can return the valve when the pilot pressure Spools.

3-position valves Permissible flow $q_v$ in L/min						Pre-load gvalve, required for $X =$ internal	
Spool	Operating pressure $p_{max}$ in MPa						
	7	14	21	28	35		
spring-centred <sup>1)</sup>							
E, J, L, M, Q, U, W, R	1100	1040	860	750	680	Spools F, G, H, P and T in general, spool V up to 180 L/min	
G, T, H, F, P	900	900	800	650	450		
V	1100	1000	680	500	450		
for all spools	1100	1040	860	750	680		

## Attention!

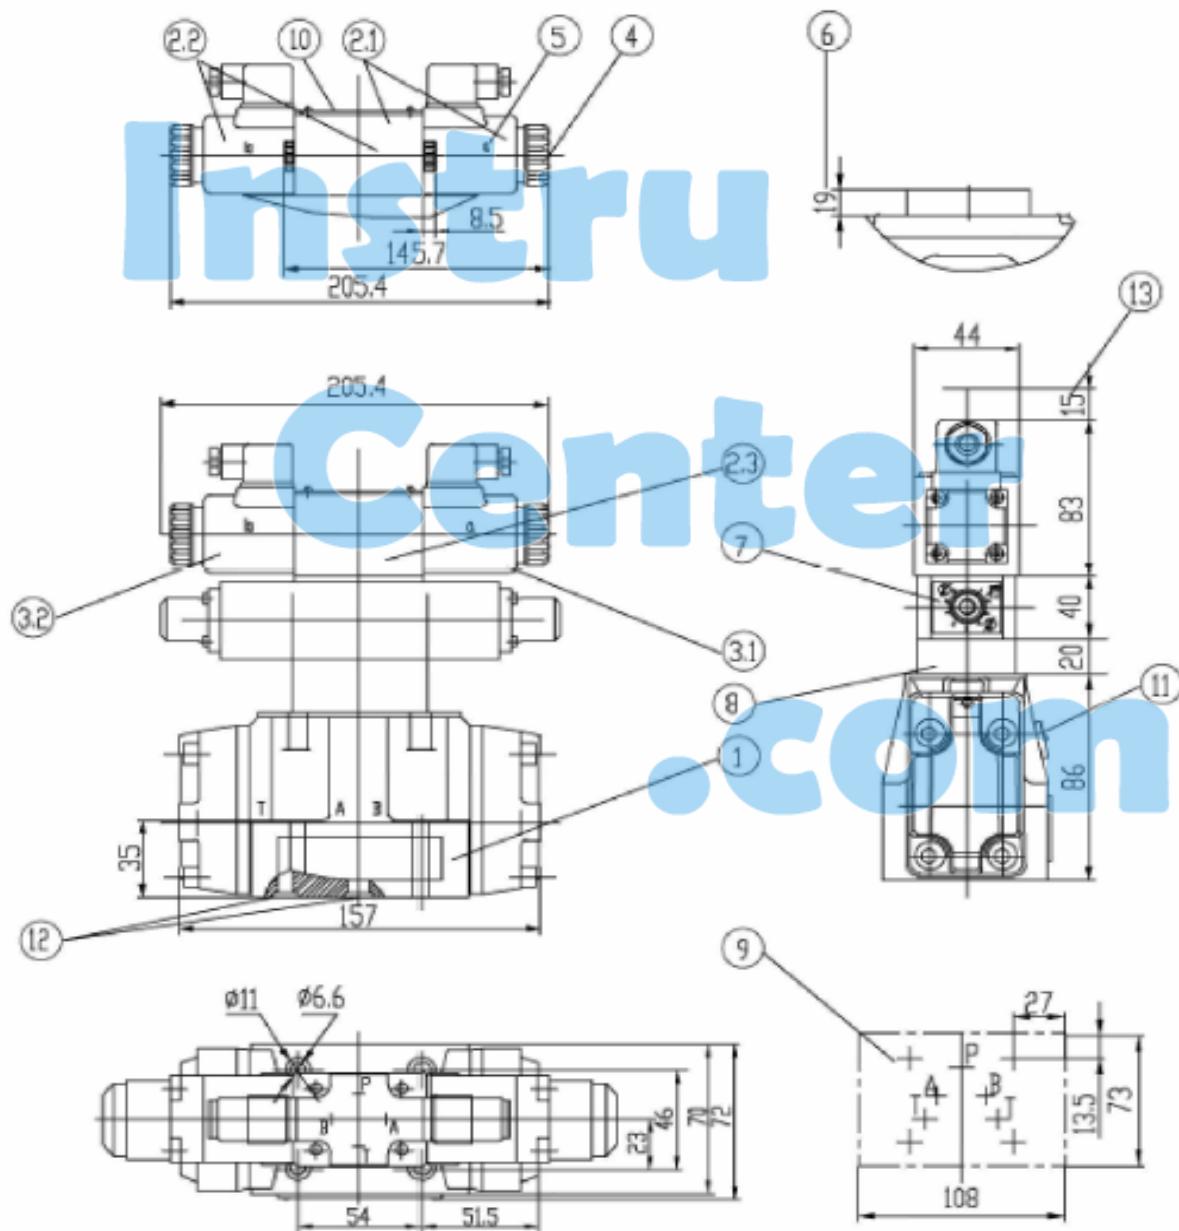
When using 4/3-way directional valves with spring-centring of the control spool in the main valve, which exceeds the given performance limits, a higher pilot pressure is required.

Example: At an operating pressure of  $p_{max} = 35 \text{ MPa}$  and a flow of  $q_v = 1100 \text{ L/min}$ , a pilot pressure of  $1.5 \text{ MPa}$  is required.

The maximum flow for those valves is therefore only dependent on the  $\Delta p$  value which is acceptable for the system.

## Unit dimensions: Type 4WEH 10...

(Dimensions in mm)



## Subplate

G 534/01 (G 3/4"), — without port X, Y

G 535/01 (G 3/4"), &gt; with port X, Y

G 536/01 (G 1")

Valve fixing screws 4- M6 × 45 -10.9

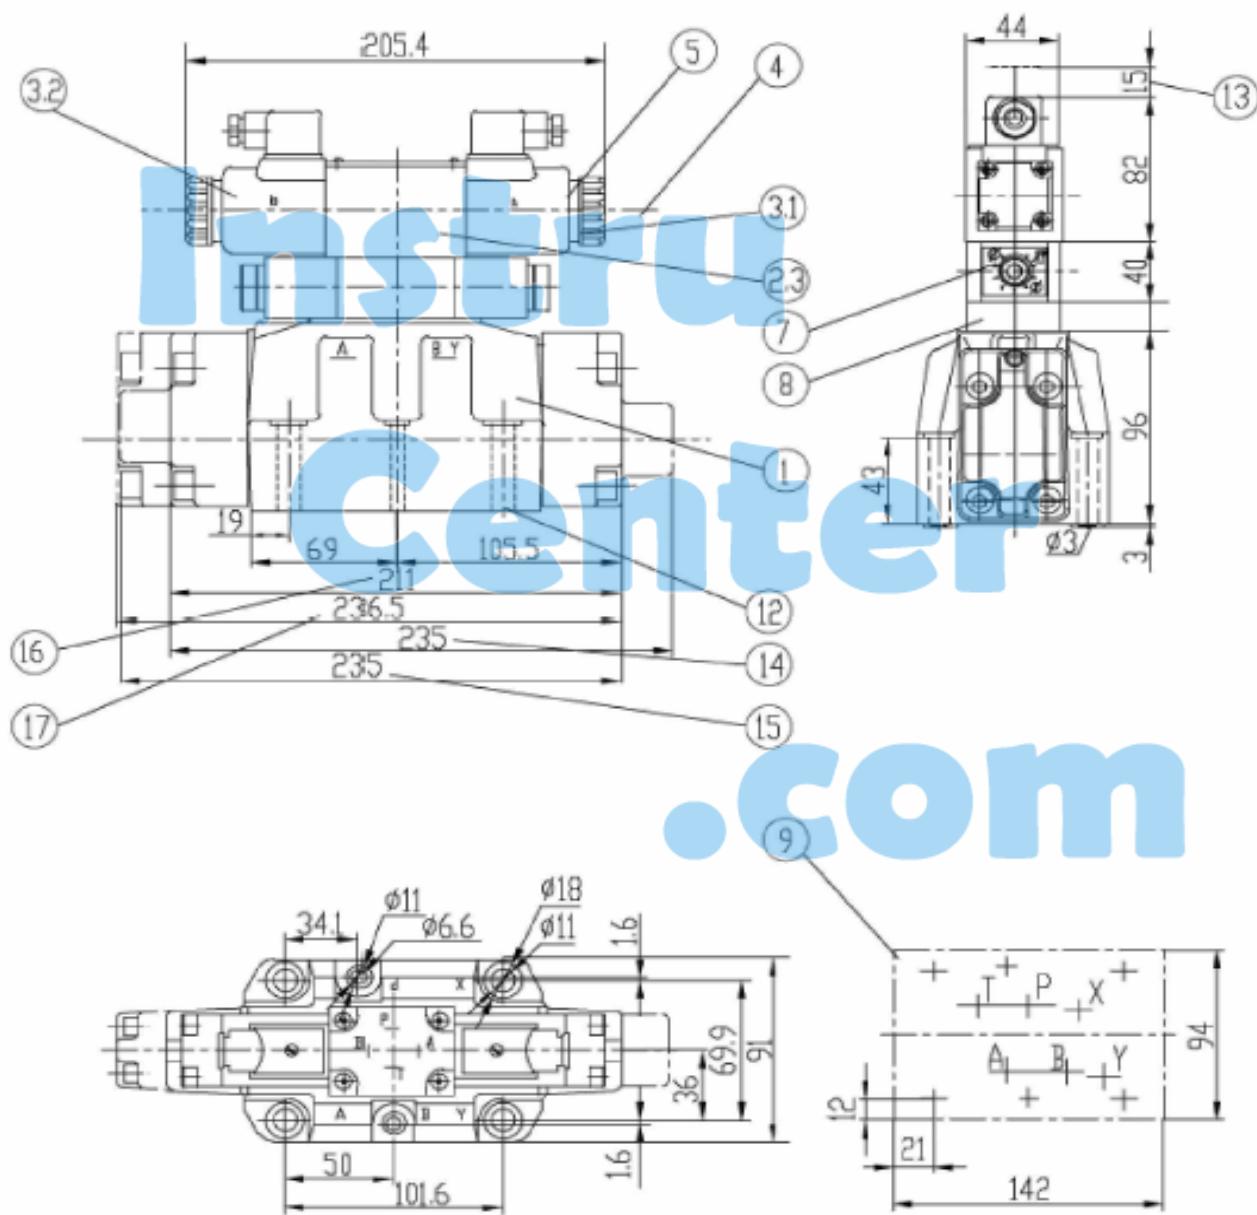
(GB/T70.1-2000)

 $M_A = 15.5 \text{ Nm}$ 

must be ordered separately.

For items lists see page 202



**Unit dimensions: Type 4WEH 16...****(Dimensions in mm)****Subplates**

G 172/01 (G 3/4"), G 172/02 (M27 x 2),  
 G 174/01 (G 1"), G 174/02 (M33 x 2), G 174/08 (flange)

**Valve fixing screws**

4 - M10 x 60-10.9 (GB/T70.1-2000)

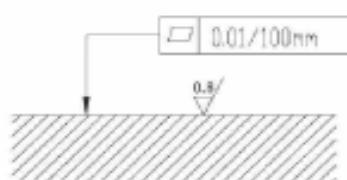
$M_A = 75 \text{ Nm}$

2 - M6 x 60-10.9 (GB/T70.1-2000)

$M_A = 15.5 \text{ Nm}$

must be ordered separately.

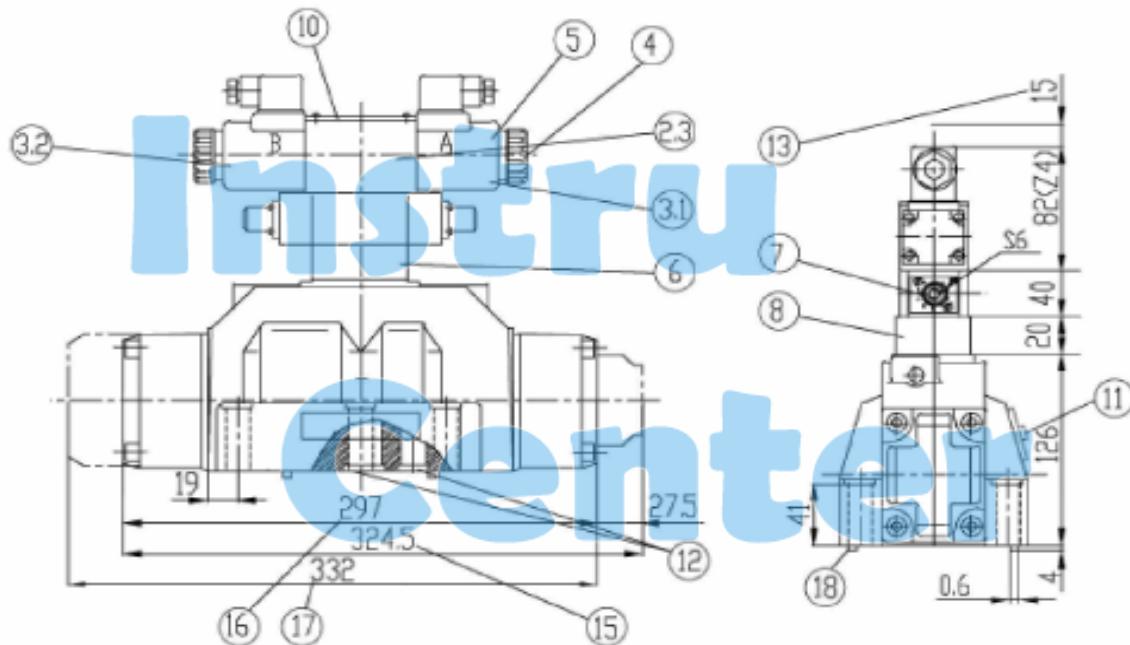
For items list, see page 202



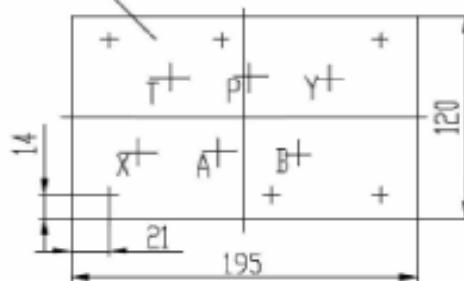
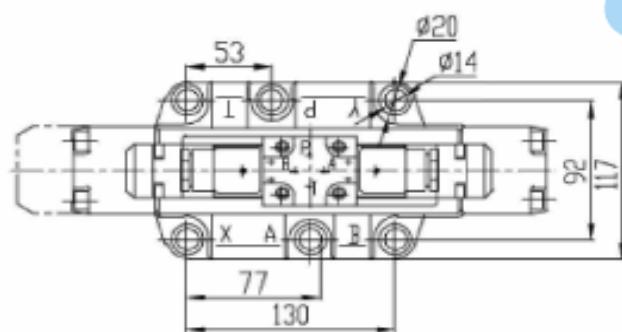
Required surface finish of  
the mating piece

## Unit dimensions: Type 4WEH 25...

(Dimensions in mm)



dimension of ports connective plate is the same as style:WEH25...50/



## Subplates

G 151/01 (G 1")

G 153/01 (G 1"), for valves with pressure-centred neutral position

G 154/01 (G 1 1/4"), G 154/08 (flange)

G 156/01 (G 1 1/2")

## Valve fixing screws

6 - M12 x 60 -10.9 (GB/T70.1-2000)

 $M_A = 130 \text{ Nm}$ 

must be ordered separately.

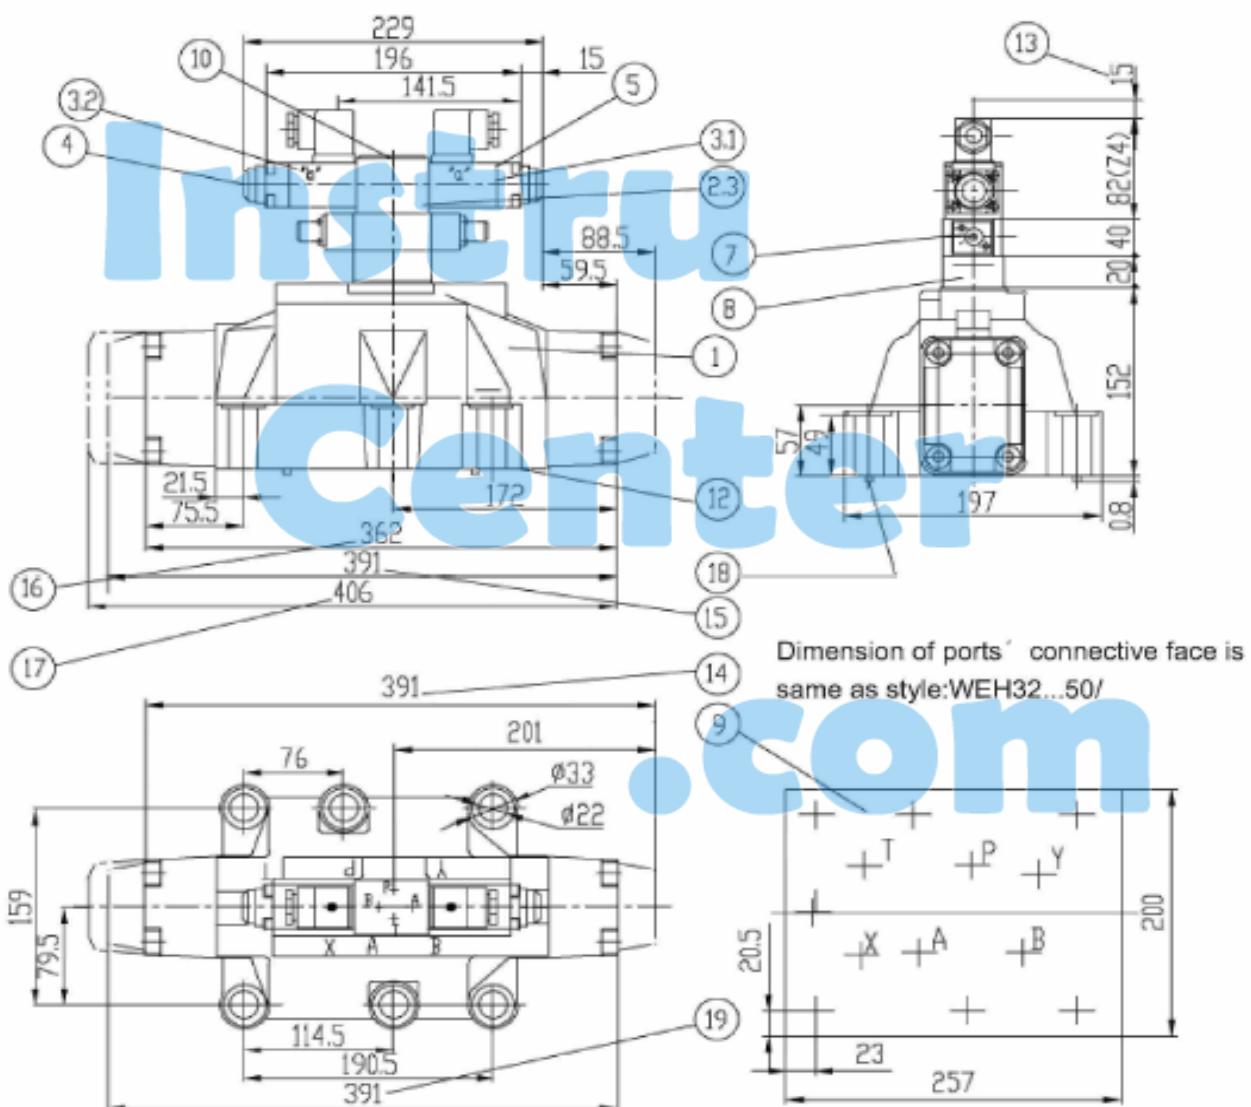
For items list, see page 202



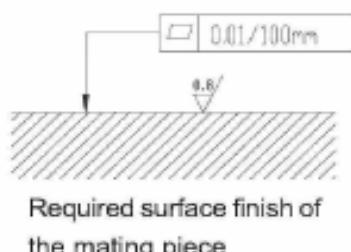
Required surface finish of  
the mating piece

## Unit dimensions: Type 4WEH 32...

(Dimensions in mm)

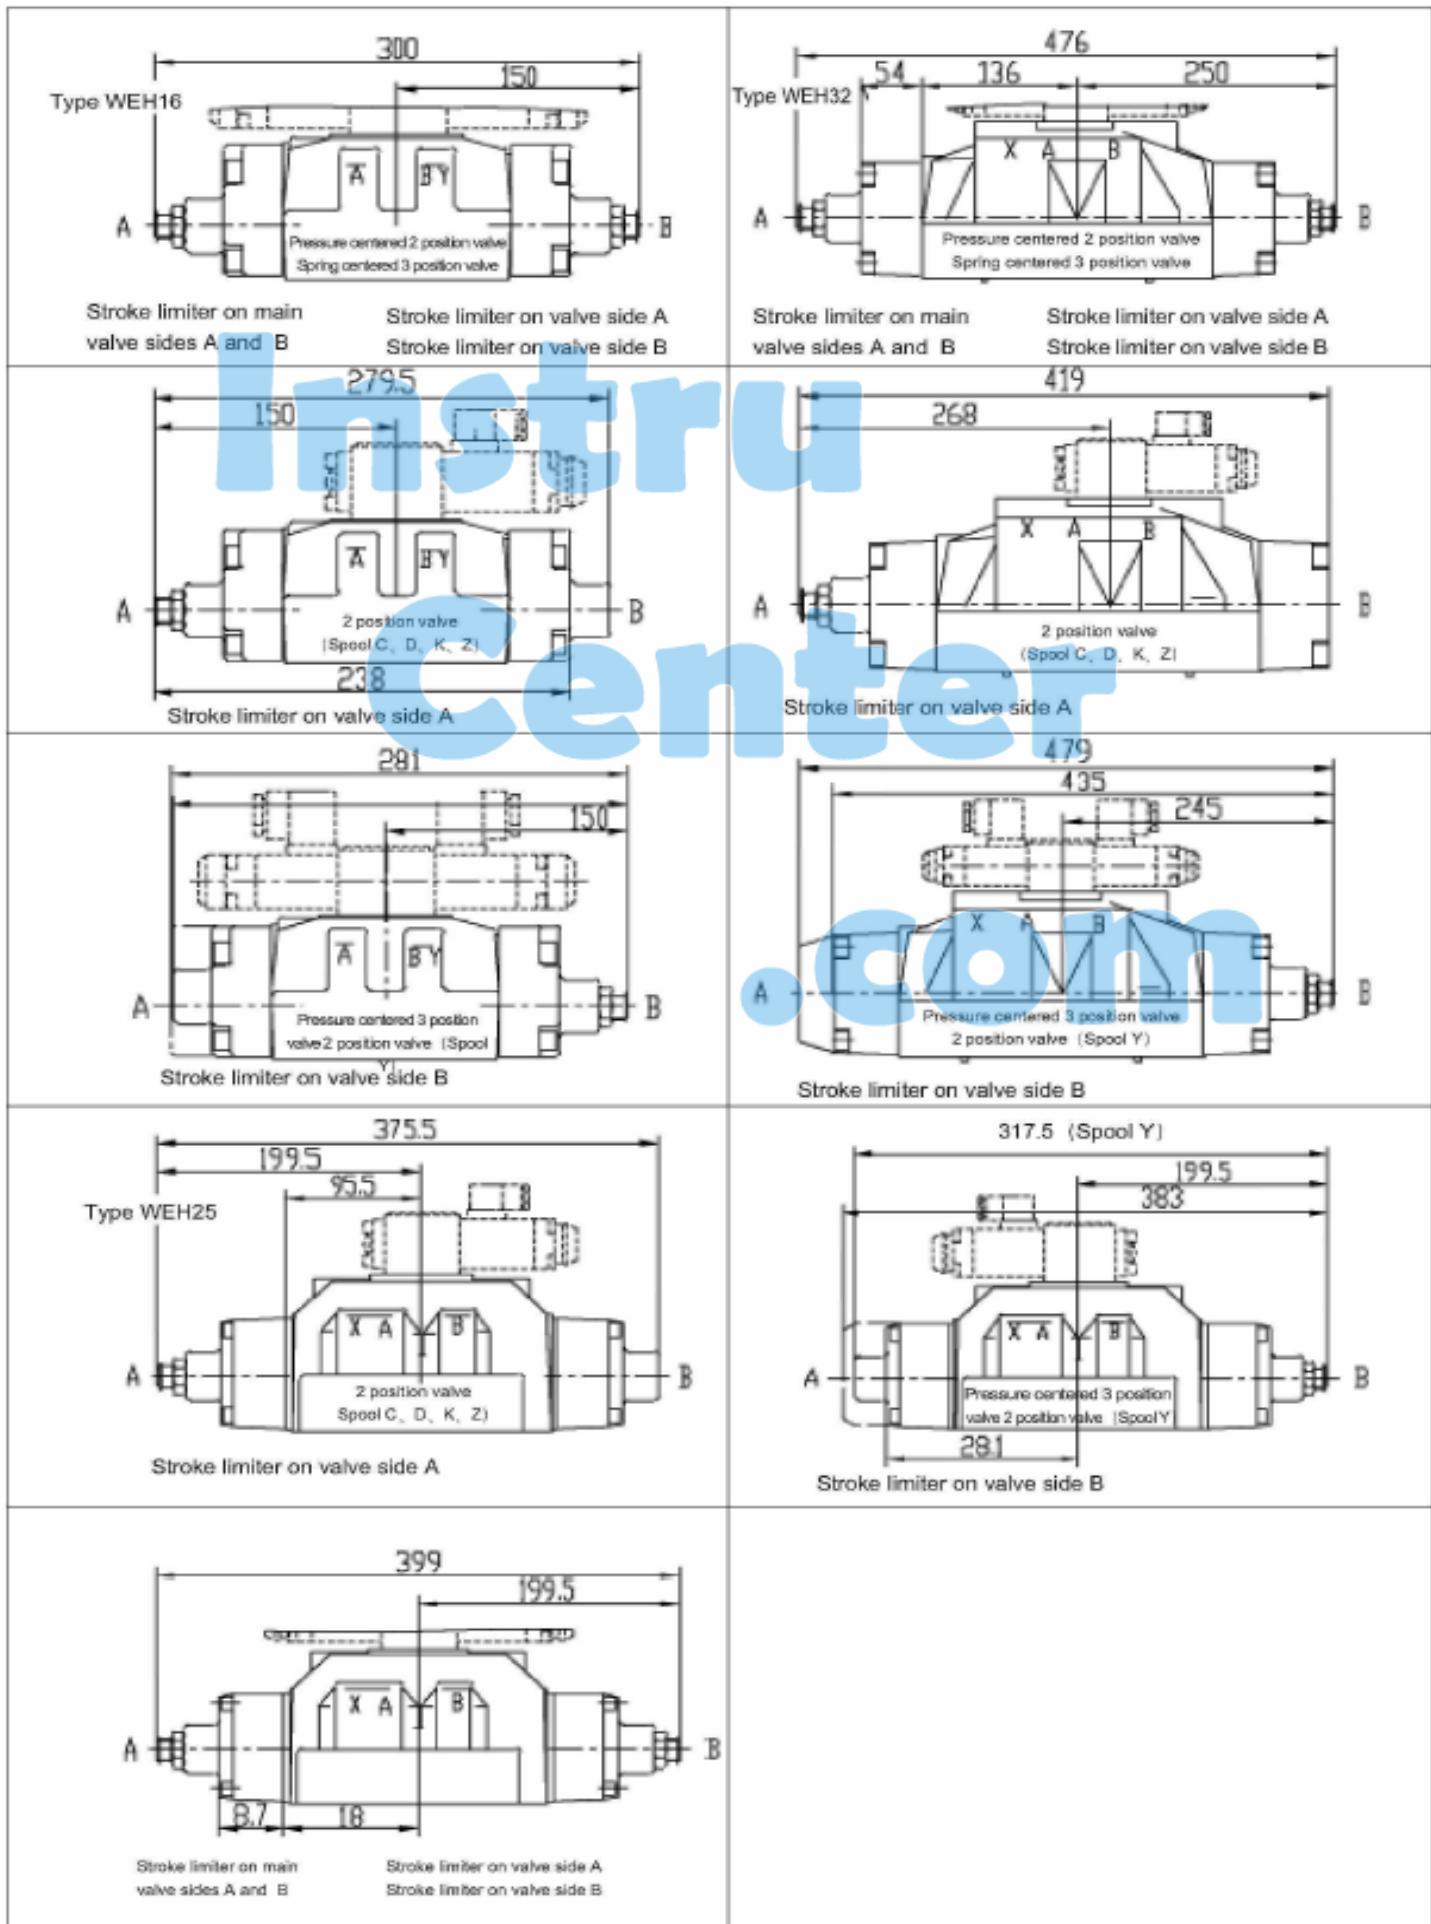


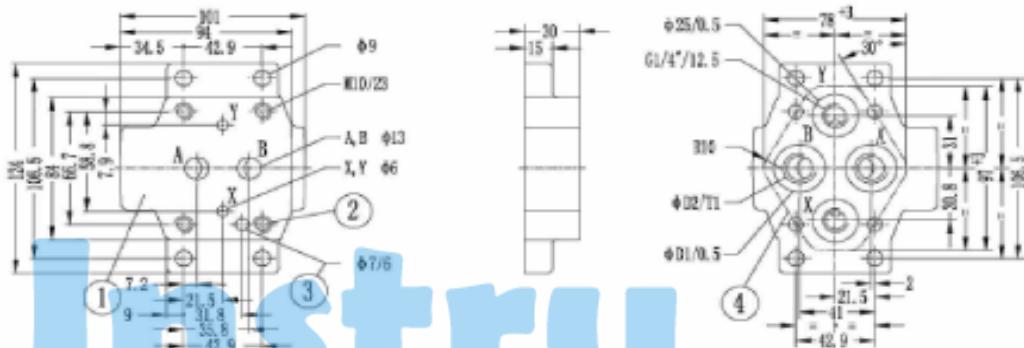
Subplates  
G 157/01 (G 1 1/2"),  
G 157/02 (M48 x 2),  
G 158/10 (flange)  
Valve fixing screws  
6 - M20 x 80-10.9 (GB/T70.1-2000)  
 $M_A = 430 \text{ Nm}$   
must be ordered separately.  
For items list, see page 202



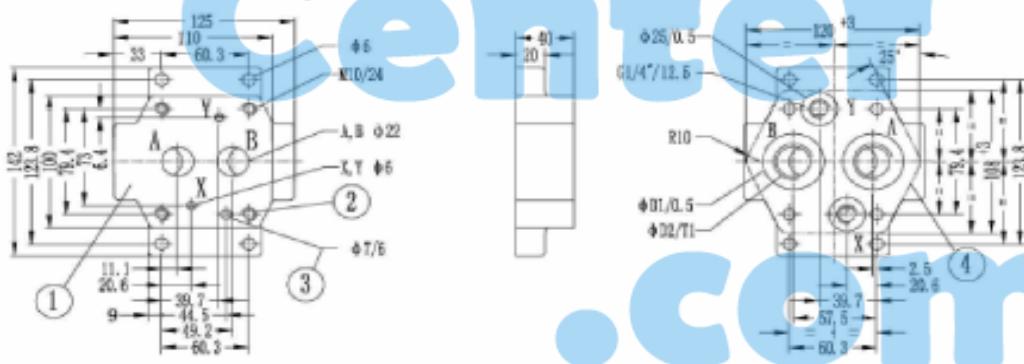
**List of items:**

- | 1 Main valve   | 9 Machined valve mounting surface, position of ports   |              |            |         |    |        |              |    |          |        |    |        |        |    |        |        |
|--|--|--------------|------------|---------|----|--------|--------------|----|----------|--------|----|--------|--------|----|--------|--------|
| 2 Pilot valve type 4WE 6 ...   | 10 Nameplate for the pilot valve   |              |            |         |    |        |              |    |          |        |    |        |        |    |        |        |
| 2.1 · Pilot valve type 4WE 6 D(1 solenoid) for main valves with spools C, D, K, Z<br>spools HC, HD, HK, HZ                                   | 11 Nameplate for the entire valve  |              |            |         |    |        |              |    |          |        |    |        |        |    |        |        |
| · Pilot valve type 4WE 6 J...(1 solenoid "a") for main valves with spools EA, FA, etc., spring return  | 12 O-rings   |              |            |         |    |        |              |    |          |        |    |        |        |    |        |        |
| · Pilot valve type 4WE 6 M...(1 solenoid "a") for main valves with spools HEA, HFA, etc., hydraulic spool return                             | 13 Space required to remove the plug-in connector  |              |            |         |    |        |              |    |          |        |    |        |        |    |        |        |
| 2.2 · Pilot valve type 4WE 6 Y...(1 solenoid) for main valves with spool Y spool HY  | 14 2-position valves with spring offset in the main valve (C, D, K, Z)   |              |            |         |    |        |              |    |          |        |    |        |        |    |        |        |
| · Pilot valve type 4WE 6 J...(1 solenoid "b") for main valves with spools EB, FB, etc., spring return  | 15 2-position valves with spring offset in the main valve (Y)  |              |            |         |    |        |              |    |          |        |    |        |        |    |        |        |
| · Pilot valve type 4WE 6 M...(1 solenoid "b") for main valves with spools HEB, HFB, etc., hydraulic spool return                             | 16 3-position valves, spring-centred;<br>2-position valves with hydraulic offset in the main valve   |              |            |         |    |        |              |    |          |        |    |        |        |    |        |        |
| 2.3 · Pilot valve type 4WE 6 J...(2 solenoids) for main valves with 3 positions, spring-centred  | 17 3-position valves, pressure-centred   |              |            |         |    |        |              |    |          |        |    |        |        |    |        |        |
| · Pilot valve type 4WE 6 M...(2 solenoids) for main valves with 3 positions, pressure-centred  | 18 Locating pin  |              |            |         |    |        |              |    |          |        |    |        |        |    |        |        |
| 3.1 Solenoid "a" (grey plug-in connector)  | O-Ring used at the bottom of the housing:  |              |            |         |    |        |              |    |          |        |    |        |        |    |        |        |
| 3.2 Solenoid "b" (black plug-in connector)   | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Order no.</th> <th style="text-align: center;">A, B, P, T</th> <th style="text-align: center;">X, Y, L</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">10</td> <td style="text-align: center;">12 × 2</td> <td style="text-align: center;">10.82 × 1.78</td> </tr> <tr> <td style="text-align: center;">16</td> <td style="text-align: center;">22 × 2.5</td> <td style="text-align: center;">10 × 2</td> </tr> <tr> <td style="text-align: center;">25</td> <td style="text-align: center;">27 × 3</td> <td style="text-align: center;">19 × 3</td> </tr> <tr> <td style="text-align: center;">32</td> <td style="text-align: center;">42 × 2</td> <td style="text-align: center;">12 × 2</td> </tr> </tbody> </table> | Order no.    | A, B, P, T | X, Y, L | 10 | 12 × 2 | 10.82 × 1.78 | 16 | 22 × 2.5 | 10 × 2 | 25 | 27 × 3 | 19 × 3 | 32 | 42 × 2 | 12 × 2 |
| Order no.  | A, B, P, T   | X, Y, L      |            |         |    |        |              |    |          |        |    |        |        |    |        |        |
| 10   | 12 × 2   | 10.82 × 1.78 |            |         |    |        |              |    |          |        |    |        |        |    |        |        |
| 16   | 22 × 2.5   | 10 × 2       |            |         |    |        |              |    |          |        |    |        |        |    |        |        |
| 25   | 27 × 3   | 19 × 3       |            |         |    |        |              |    |          |        |    |        |        |    |        |        |
| 32   | 42 × 2   | 12 × 2       |            |         |    |        |              |    |          |        |    |        |        |    |        |        |
| 4 Manual override "N", optional  |  |              |            |         |    |        |              |    |          |        |    |        |        |    |        |        |
| - The manual override can only be operated up to a tank pressure of up to approx. 5MPa.<br>Take care not to damage the manual override bore! |  |              |            |         |    |        |              |    |          |        |    |        |        |    |        |        |
| 5 Solenoid without manual override   |  |              |            |         |    |        |              |    |          |        |    |        |        |    |        |        |
| 6 Height of the connector plate for hydraulic operation (type 4WH...)  |  |              |            |         |    |        |              |    |          |        |    |        |        |    |        |        |
| 7 Shifting time adjustment (A/F 16), optional  |  |              |            |         |    |        |              |    |          |        |    |        |        |    |        |        |
| 8 Pressure reducing valve, optional  |  |              |            |         |    |        |              |    |          |        |    |        |        |    |        |        |

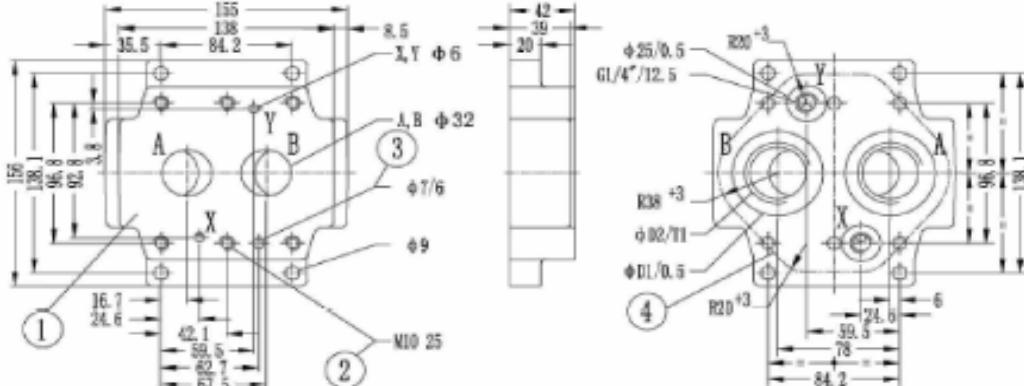


**Subplates**

Size	Type	D1	D2	T1	Valve fixing screws	Tightening torque for screws	Weight			
NG10	G460/01	28	G3/8"	13	4 - M10 × 40 -10.9 (GB/T70.1-2000)	69Nm	1.7kg			
	G460/02		M18 × 1.5							
	G461/01	34	G1 1/2"	16						
	G461/02		M22 × 1.5							

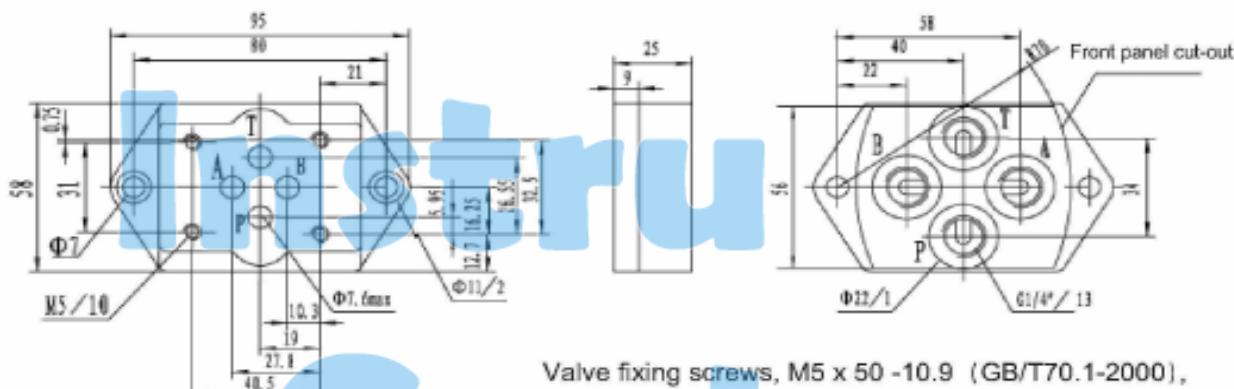
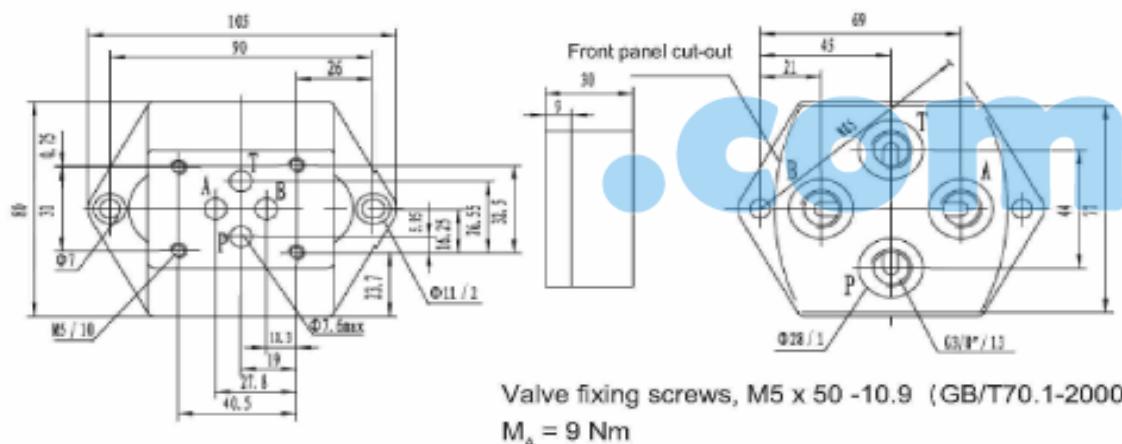
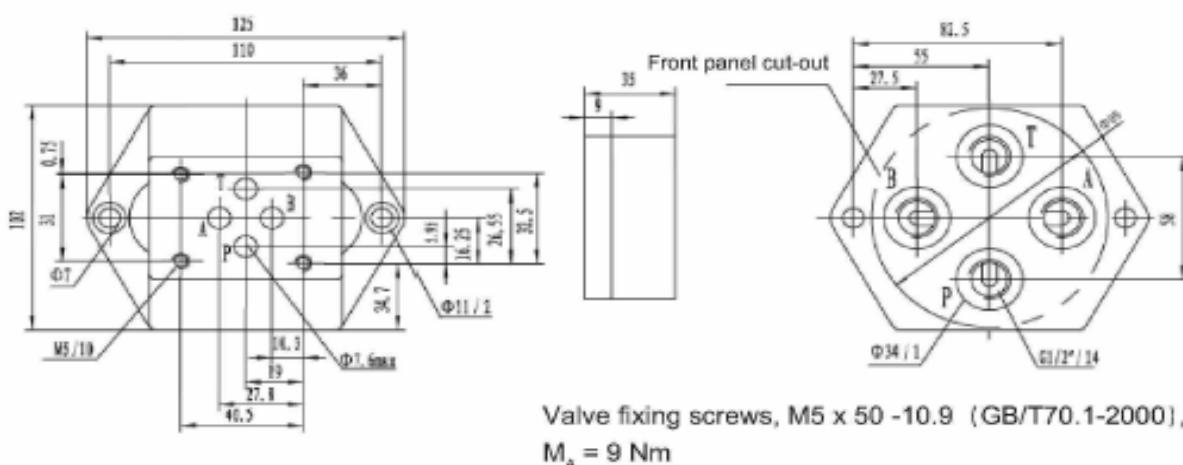


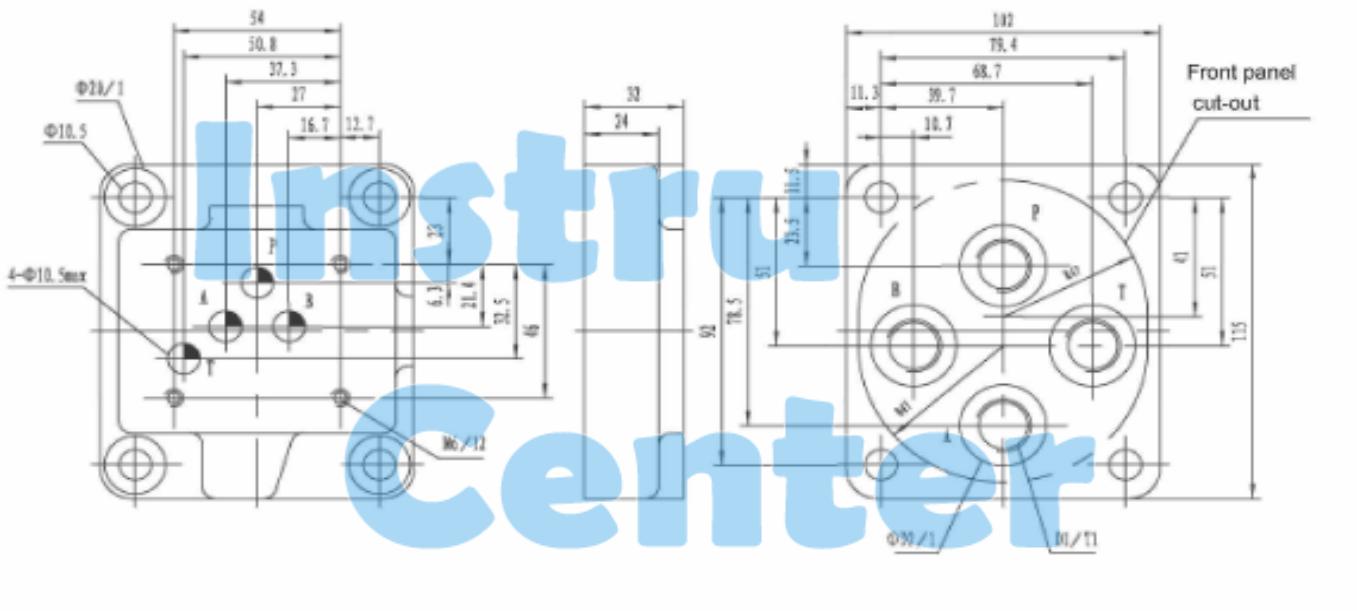
Size	Type	D1	D2	T1	Valve fixing screws	Tightening torque for screws	Weight			
NG25	G412/01	42	G3/4"	17	4 - M10 × 50 -10.9 (GB/T70.1-2000)	69Nm	3.3kg			
	G412/02		M27 × 2							
	G413/01	47	G1"	20						
	G413/02		M33 × 2							



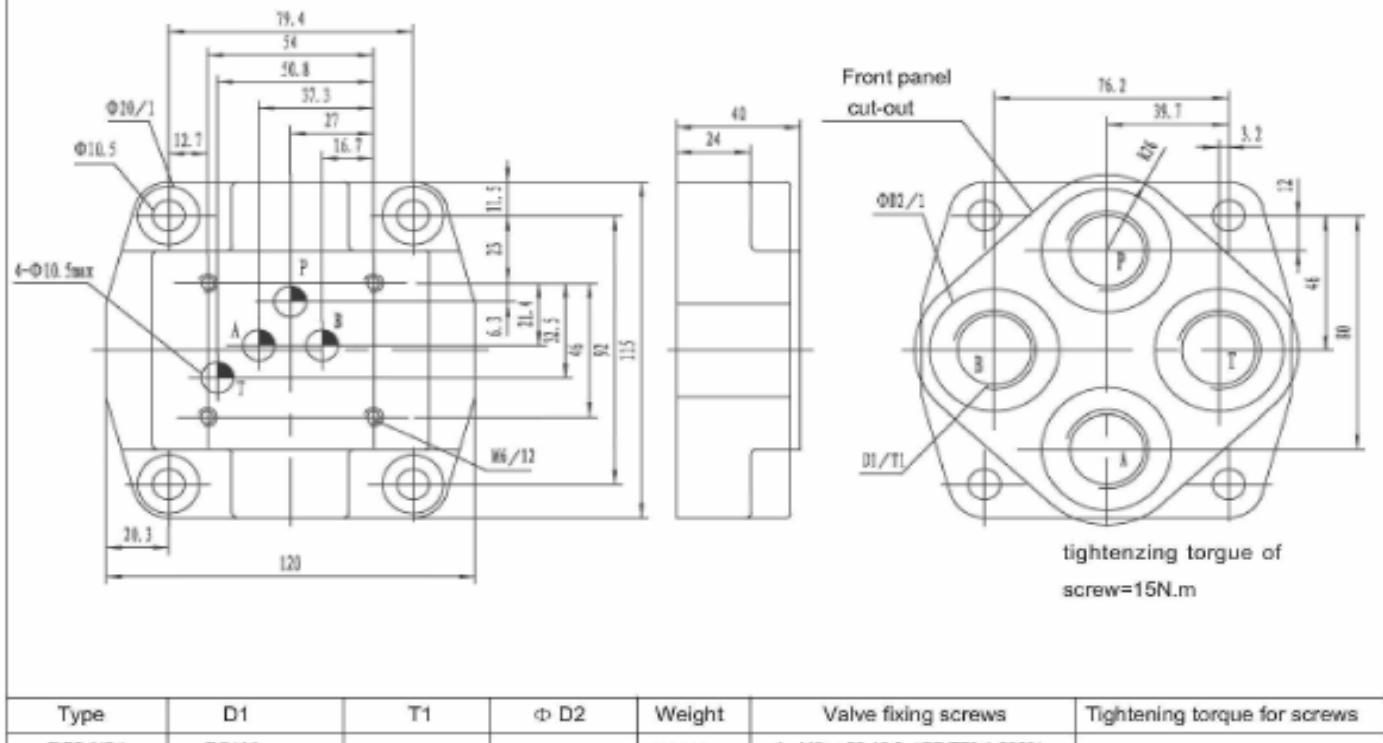
Size	Type	D1	D2	T1	Valve fixing screws	Tightening torque for screws	Weight			
NG32	G414/01	56	G1 1/4"	20.5	6 - M10 × 60 -10.9 (GB/T70.1-2000)	69Nm	5kg			
	G414/02		M42 × 2							
	G415/01	61	G1 1/2"	22.5						
	G415/02		M48 × 2							

**1 mating piece of valve    2 Valve fixing screws    3 locating pin    4 Front panel cut-out**

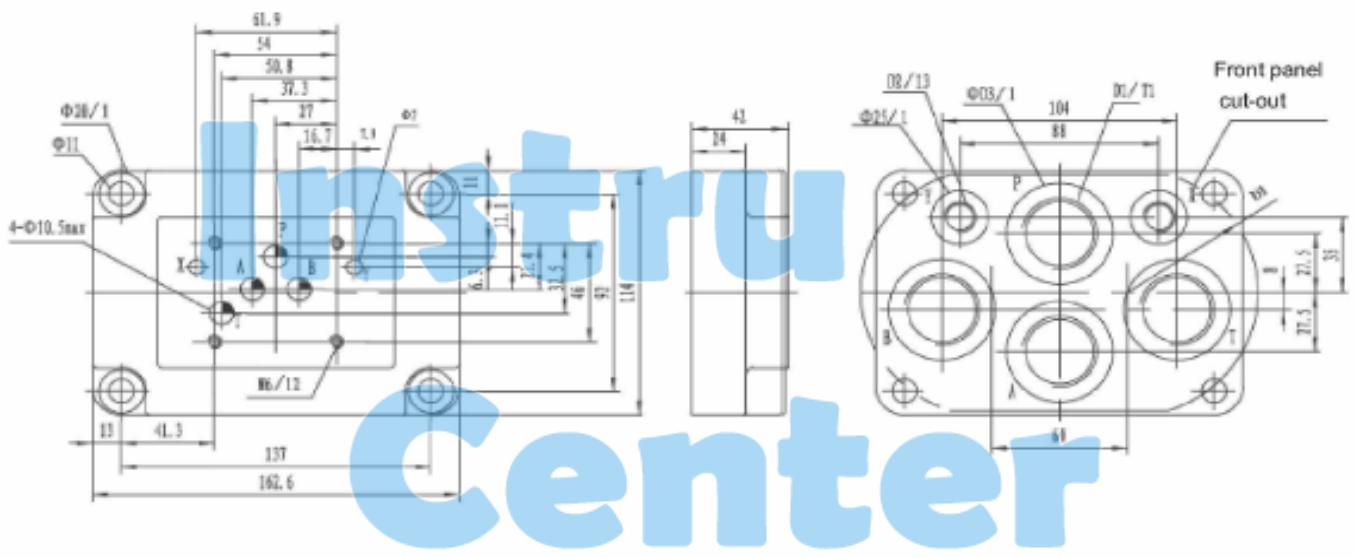
**Subplates****G341/01 (G1/4" ) G341/02 (M14x1.5) Weight ≈ 0.6kg****(Dimensions in mm)****G342/01 (G3/8" ) G342/02 (M18x1.5) Weight ≈ 1.1kg****(Dimensions in mm)****G502/01 (G1/2" ) G502/02 (M22x1.5) Weight ≈ 1.9kg****(Dimensions in mm)**

**Subplates****G66/01 G66/02 G67/01 G67/02****(Dimensions in mm)**

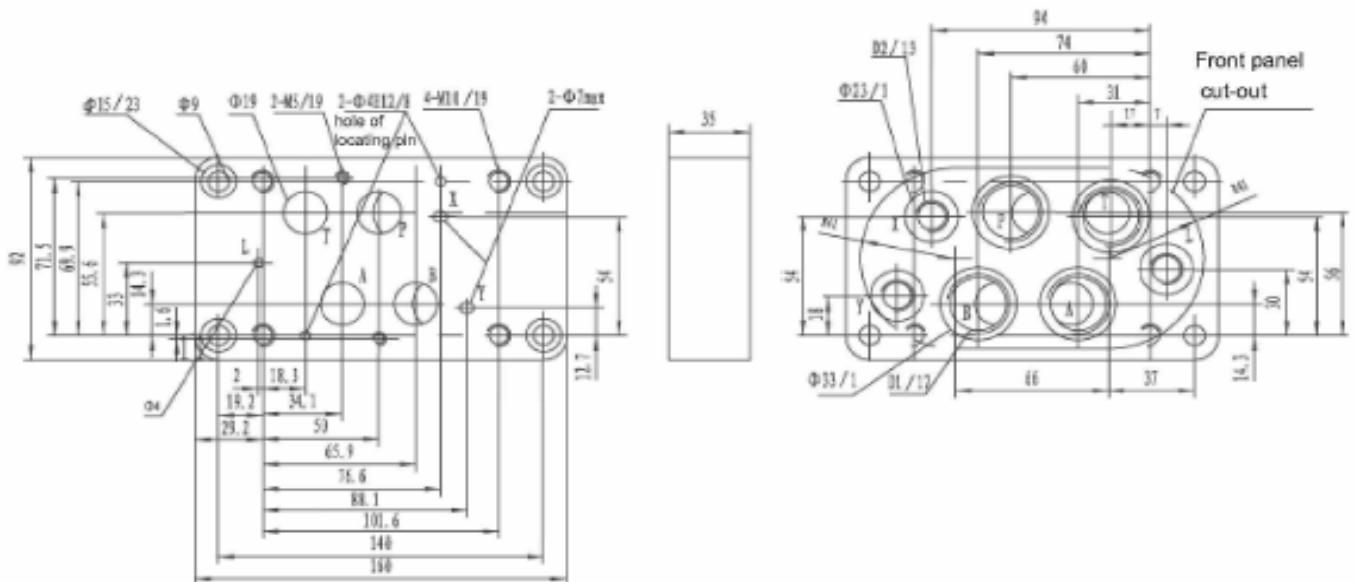
Type	D1	T1	Φ D2	Weight	Valve fixing screws	Tightening torque for screws
G66/01	G3/8"				4 - M6 × 50-10.9 (GB/T70.1-2000), Should be ordered seperately.	
G66/02	M18x1.5	12	28	approx. 2.3Kg		
G67/01	G1/2"					
G67/02	M22x1.5	14	34			

**G534/01 G534/02****(Dimensions in mm)**

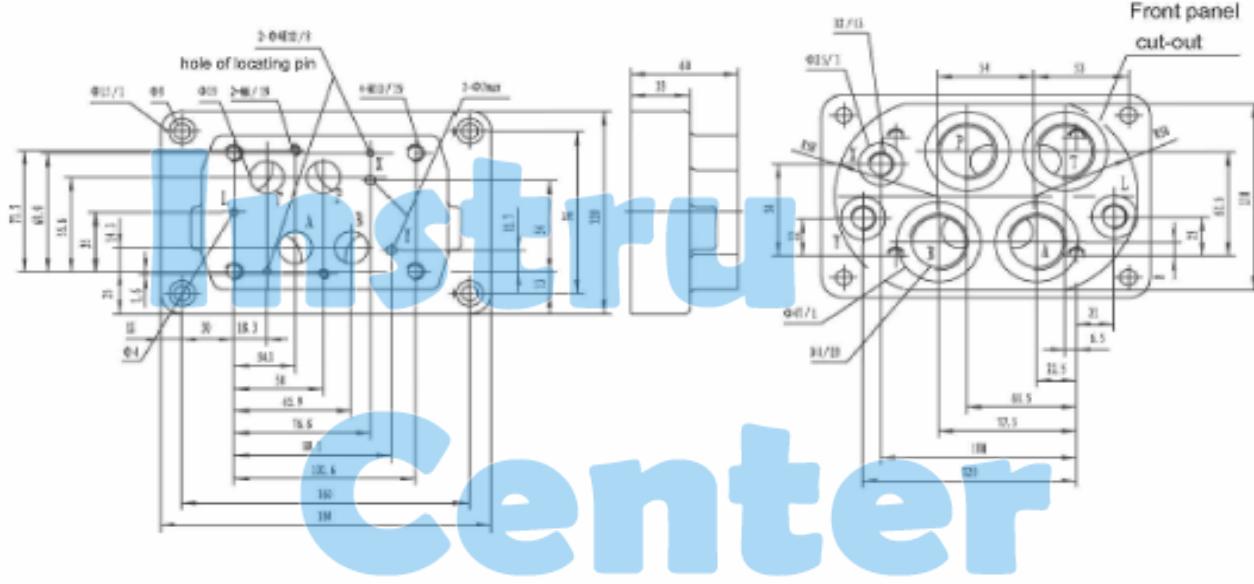
Type	D1	T1	Φ D2	Weight	Valve fixing screws	Tightening torque for screws
G534/01	G3/4"				4 - M6 × 50-10.9 [GB/T70.1-2000], Should be ordered seperately.	
G534/02	M27x2	17	42	approx. 2.5Kg		

**Subplates****G535/01 G535/02 G536/01 G536/02****(Dimensions in mm)**

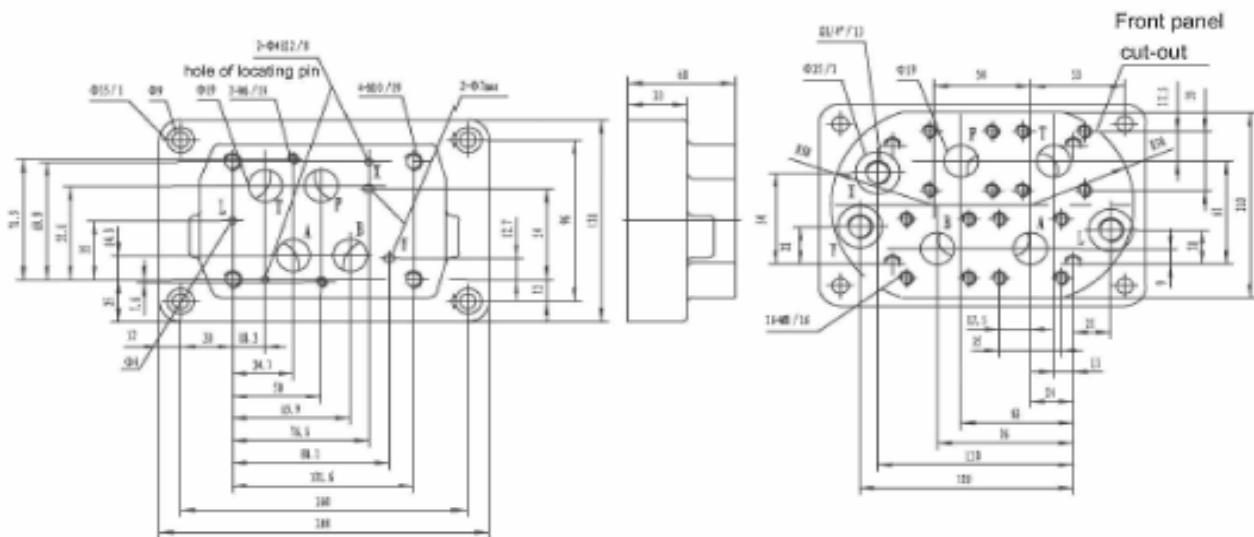
Type	D1	T1	D2	$\phi$ D3	Weight	Valve fixing screws	Tightening torque for screws
G535/01	G3/4"	16	G1/4"	42	approx. 3.6Kg	4 - M6 × 45 -10.9 (GB/T70.1-2000) Should be ordered seperately.	15N.m
G535/02	M27x2		M14x1.5				
G536/01	G1"	18	G1/4"	47			
G536/02	M33x2		M14x1.5				

**G172/01 G172/02****(Dimensions in mm)**

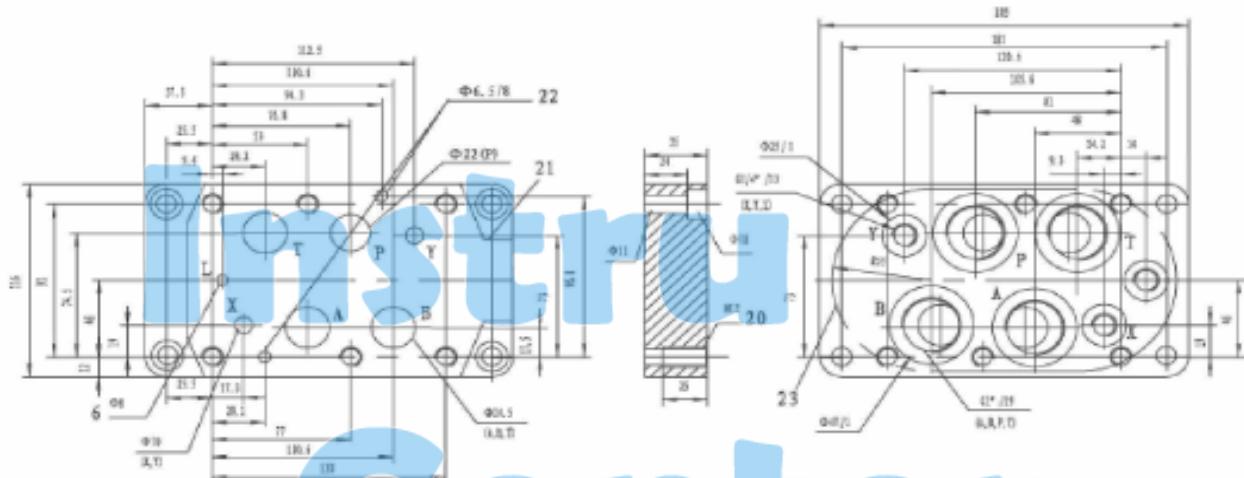
Type	D1	D2	Weight	Valve fixing screws	Tightening torque for screws
G172/01	G3/4"	G1/4"	approx. 2.8kg	4 - M10 × 60 -10.9 (GB/T70.1-2000) ,Should be ordered seperately.	62N.m
G172/02	M27x2	M14x1.5		2 - M6 × 60 --10.9 (GB/T70.1-2000) ,Should be ordered seperately.	12.5N.m

**Subplates****G174/01 G174/02****(Dimensions in mm)**

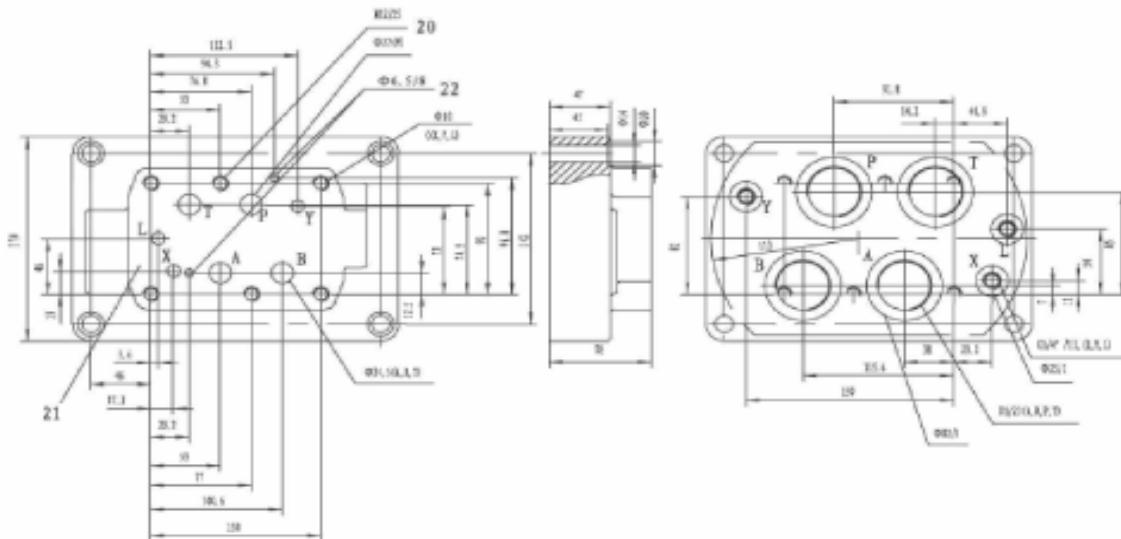
Type	D1	D2	Weight	Valve fixing screws	Tightening torque for screws
G174/01	G1"	G1/4"	approx.	4 - M10 × 60-10.9 (GB/T70.1-2000), Should be ordered separately.	62N.m
G174/02	M33x2	M14x1.5	5.5kg	2 - M6 × 60-10.9 (GB/T70.1-2000), Should be ordered separately.	12.5N.m

**G174/08****(Dimensions in mm)**

Type	Pressure	Type	Weight	Valve fixing screws	Tightening torque for screws
G174/08	25MPa	009 271	approx. 5.5kg	4 - M10 × 60-10.9 (GB/T70.1-2000), Should be ordered separately.	62N.m
	40MPa	009 272		2 - M6 × 60-10.9 (GB/T70.1-2000), Should be ordered separately.	12.5N.m

**Subplates****G151/01(G1")G151/02(M33x2):G153/01(G1") G153/02(M33x2)****(Dimensions in mm)**L of  $\phi$  8 only used on G153/01

Size	Type	Weight	Valve fixing screws	Tightening torque for screws
NG25	G151/01	5kg	6 - M12x60-10.9 (GB/T70.1-2000),	105Nm
	G151/02			
	G153/01			
	G153/02			

**G154/01(G11/4");G154/02(M42x2):G156/01 G156/02(M48x2)****(Dimensions in mm)**

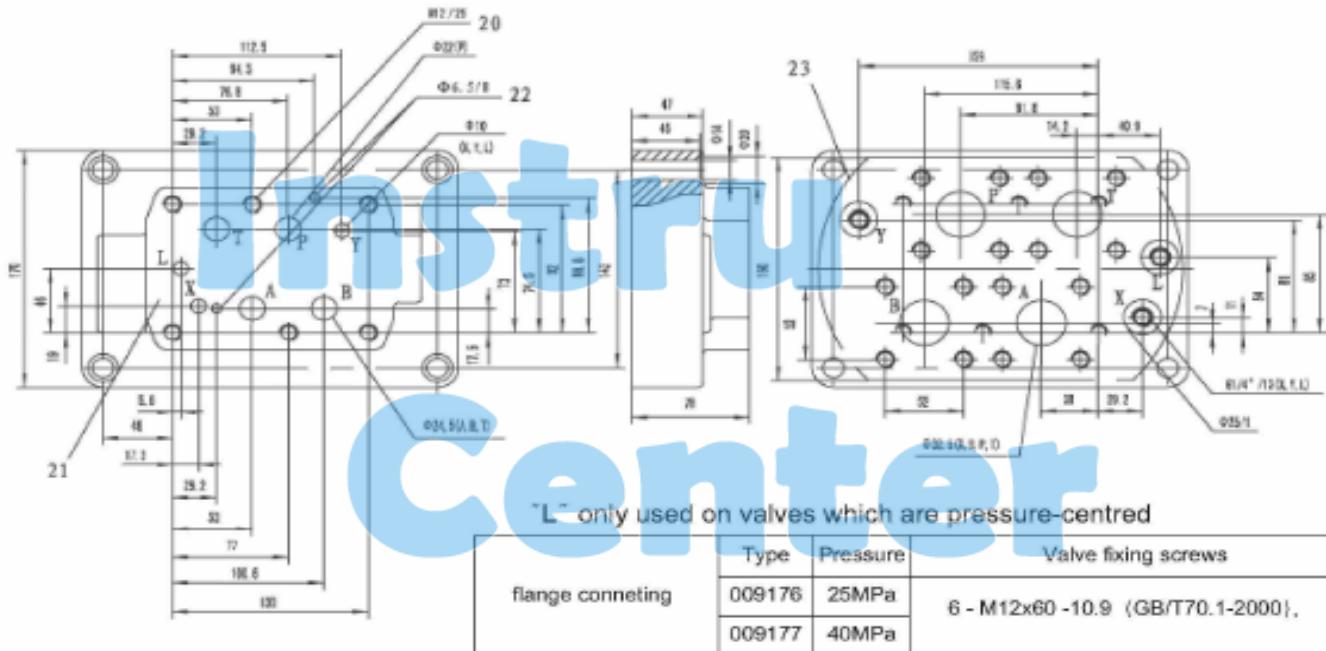
L only used on valves which are pressure-centred

Size	Type	Weight	D1	D2	Valve fixing screws	Tightening torque for screws		
NG25	G154/01	5kg	G1 1/4"	58	6 - M12x60 -10.9 (GB/T70.1-2000)	105Nm		
	G154/02							
	G156/01		G1 1/2"	65				
	G156/02							

**20 Valve fixing screws 21 mating piece of valve 22 locating pin 23 Front panel cut-out**

**Subplates****G154/08 flange connection**

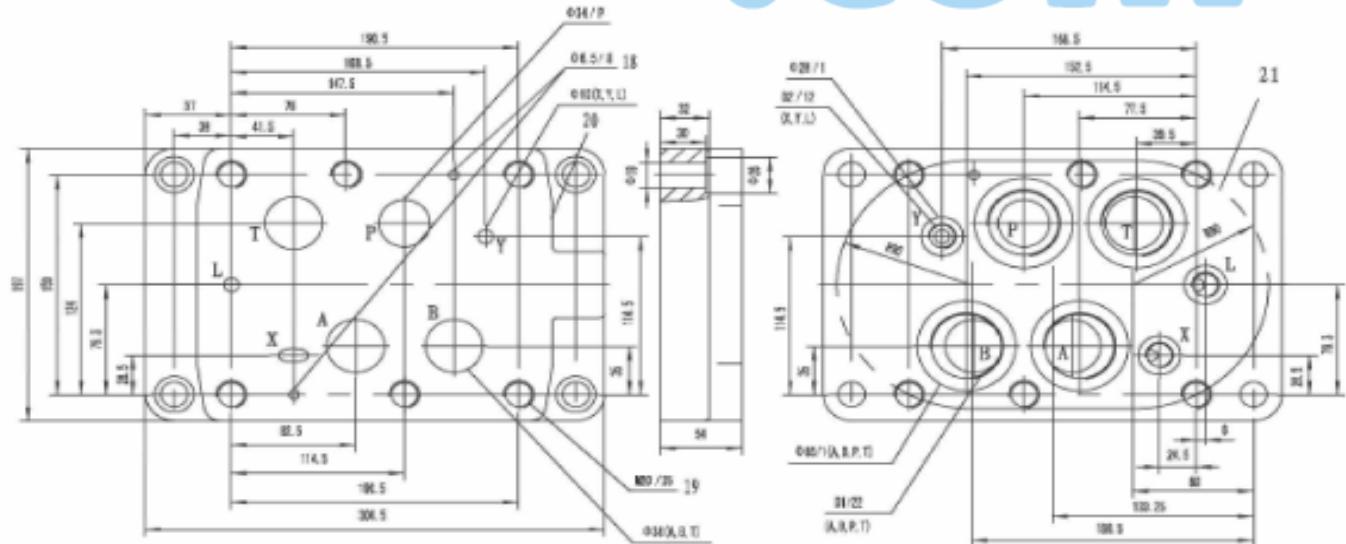
(Dimensions in mm)



**20 Valve fixing screws 21 mating piece of valve 22 locating pin 23 Front panel cut-out**

**G157/01(G1 1/2" );G157/02(M48 × 2)**

(Dimensions in mm)



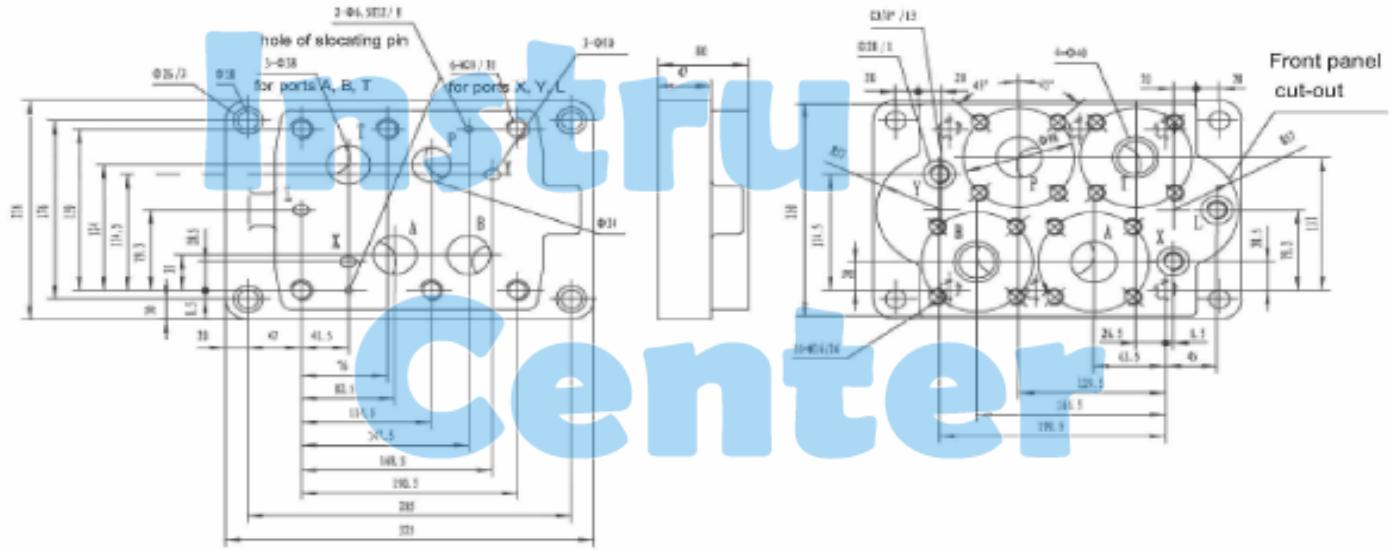
"L" only used on valves which are pressure-centred

Type	Weight	D1	D2	Valve fixing screws	Tightening torque for screws
G157/01	18kg	G1 1/2"	G3/2"	6 - M12x60-10.9 (GB/T70.1-2000)	
G157/02		M48x2	M18x1.5		105Nm

**18 locating pin 19 Valve fixing screws 20 mating piece of valve 21Front panel cut-out**

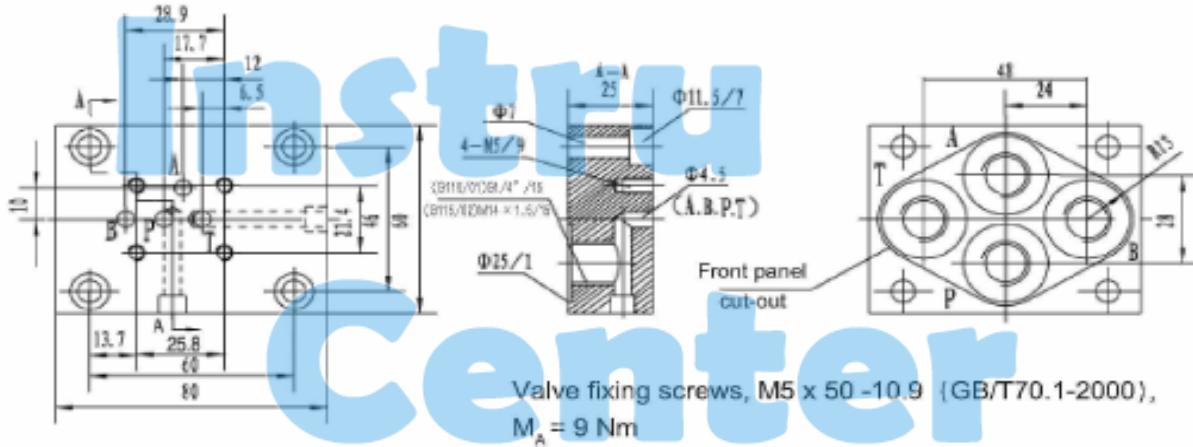
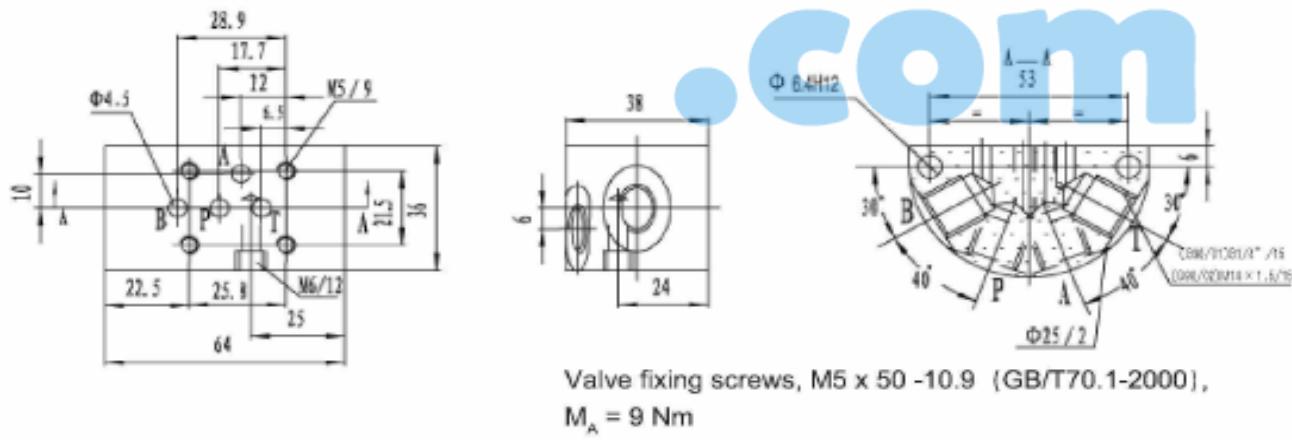
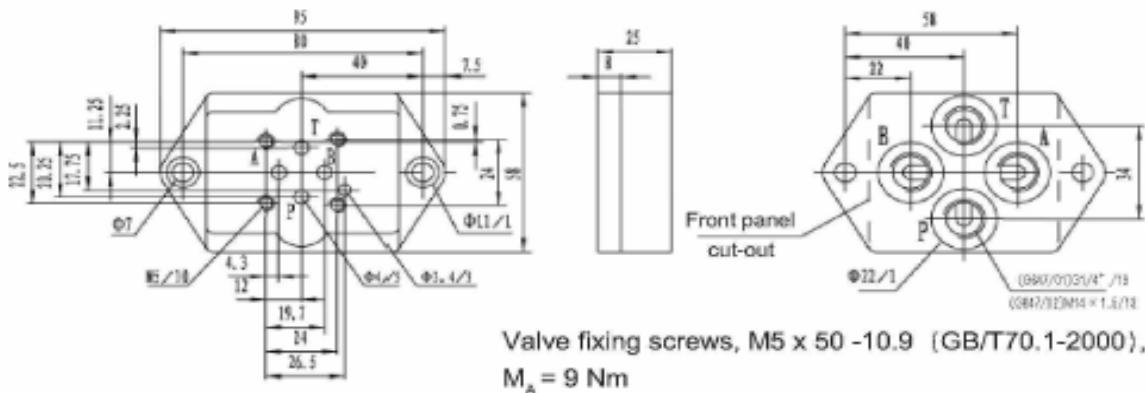
**Subplates****G158/10 flange connection**

(Dimensions in mm)



"L" only used on valves which are pressure-centred

Type	Pressure	Type	Weight	Valve fixing screws	Tightening torque for screws
G158/10	165MPa	303 901	approx. 30.5kg	6 - M20 × 80 -10.9- (GB/T70.1-2000), Should be ordered separately.	580N.m
	to 25MPa	303 902			
	to 40MPa	303 903			

**Subplates****For applications outside these parameters, please consult us!****G115/01 (G1/4" ) G115/02 (M14x1.5)****(Dimensions in mm)****G96/01 (G1/4" ) G96/02 (M14x1.5)****(Dimensions in mm)****G647/01 (G1/4" ) G647/02 (M14x1.5)****(Dimensions in mm)**

# Instru Center .com

## Notice

1. The fluid must be filtered. Minimum filter fineness is 20 µm.
2. The tank must be sealing up and an air filter must be installed on air entrance.
3. Products without subplate when leaving factory, if need them, please ordering specially.
4. Valve fixing screws must be high intensity level (class 10.9). Please select and use them according to the parameter listed in the sample book.
5. Roughness of surface linked with the valve is required to  $\frac{0.8}{\sqrt{\text{---}}}$ .
6. Surface finish of mating piece is required to 0.01/100mm.