


6000 W x 1 W, PF, ACV, ACA, Signal phase

WATT METER

Model : DW-6163

ISO-9001, CE, IEC1010

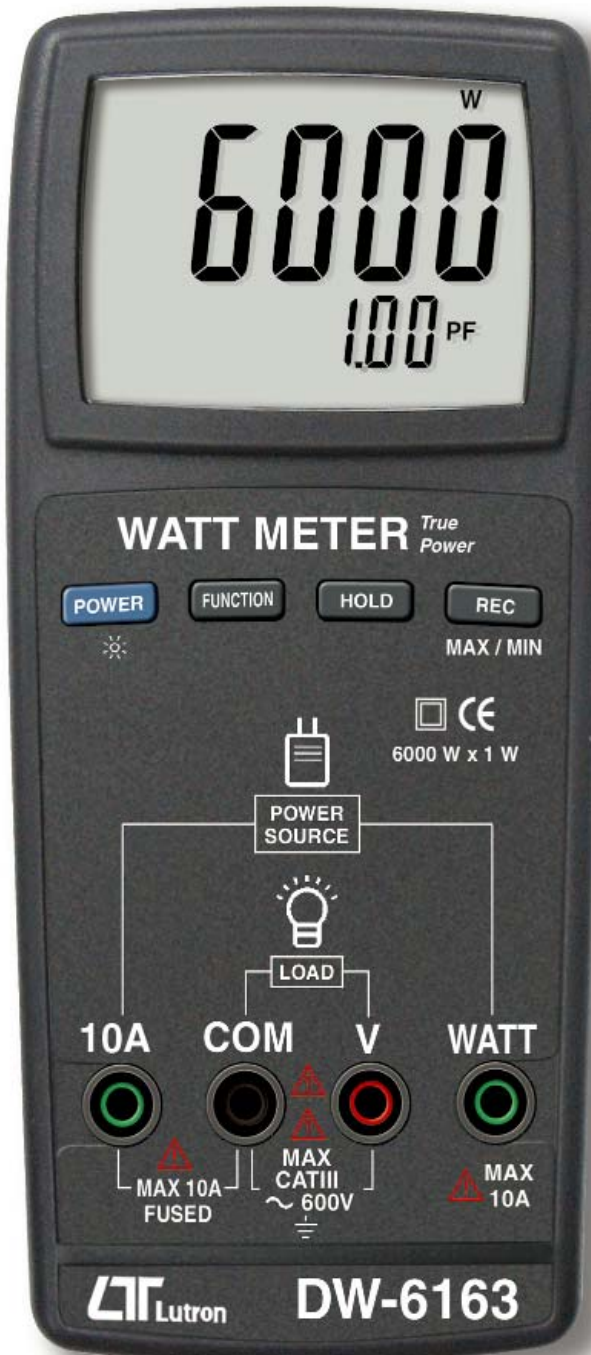

FEATURES :

- * True power measurement.
- * True rms measurement for ACV, AC.
- * Watt : 0 to 6000 W x 1 W
- * Power factor : 0.01 to 1.00 x 0.01 P
- * ACV : 0 to 600 V X 0.1 V.
- * ACA : 0 to 10.00 A x 0.01 A.
- * ACV input impedance : 10 Mega OH
- * Data Hold, Record (Max., Min.).
- * RS232/USB Computer interface.
- * Optional data Acquisition software, SW-U801-WIN, SW-E802.
- * Optional USB cable, USB-01.



LUTRON ELECTRONIC

The Art of Measurement

Precision Watt meter Precision Power meter




**6000 W x 1 W, PF, ACV, ACA, Single phase
Watt Meter**

Model : DW-6163

- * True power measurement.
- * True rms measurement for ACV, ACA.
- * Watt : 0 to 6000 W x 1 W
- * Power factor : 0.01 to 1.00 x 0.01 PF.
- * ACV : 0 to 600 V X 0.1 V.
- * ACA : 0 to 10.00 A x 0.01 A.
- * ACV input impedance : 10 Mega OHM.
- * Data Hold, Record (Max., Min.).
- * RS232/USB Computer interface.
- * Optional data Acquisition software, SW-U801-WIN, SW-E802.
- * Optional USB cable, USB-01.



Holster HS-03

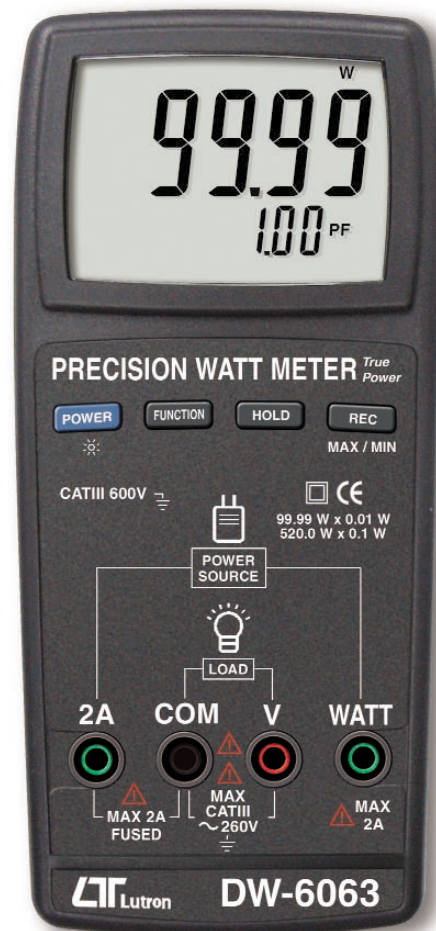

**99.99 x 0.01 W, 520.0 x 0.1 W, PF, ACV, ACA, Single phase
Precision Watt Meter**

Model : DW-6063

- * 0.01 W resolution, precision Watt meter is special for low power measurement.
- * Designed for the high resolution low power measurement.
- * Watt, Power factor, ACV, ACA.
- * True power (watt) measurement.
- * True rms measurement for ACV, ACA.
- * Auto range for Watt measurement :
Range 1 : 0.00 to 99.99 W x 0.01 W.
Range 2 : 100.0 to 520.0 W x 0.1 W.
- * Power factor : 0.01 to 1.00 x 0.01 PF.
- * ACV : 90.0 to 260.0 V x 0.1 V.
- * ACA : 0 to 2.000 A x 0.001 A.
- * ACV input impedance : 10 Mega OHM.
- * Data Hold, Record (Max., Min.).
- * RS232/USB Computer interface.
- * Optional data Acquisition software, SW-U801-WIN, SW-E802.
- * Optional USB cable, USB-01.