

ST-880/882/883/880H/882H/883H

Compact InfraRed Thermometers




- Unique flat surface, mini modern housing design
- Backlighting illuminates display for taking measurements at night or in areas with low background light levels
- Overrange indication
- Auto Data Hold when trigger released
- Auto Power Off



EMC  
EN: 50081-1, 50082-1  
EN: 60825-1

Distance (D) to Spot size (S)

D:S=8:1

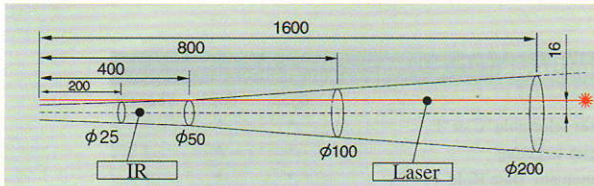

(Unit: mm)

Features

	880H/880	882H/882	883H/883
User selectable °C or °F	*	*	*
Laser targeting	*	*	*
Automatic Data Hold	*	*	*
Auto Power Off	*	*	*
Backlit LCD Display	*	*	White Backlit
Overrange indication	*	*	*
Low battery indication	*	*	*
Wide range			*

Specifications

	880H	882H	883H
Range	-50°C to 500°C/ -58°F to 932°F	-50°C to 700°C/ -58°F to 1292°F	-50°C to 850°C/ -58°F to 1562°F
Basic Accuracy	±2% of reading or ±2°C/±4°F		
Resolution	0.1° up to 200°, 1° over 200°		
Response Time	Less than 1 second		
Optical Resolution	8:1 Distance to Spot size		
Emissivity	Fixed at 0.95		


Model 882



Model 883



Model 883H

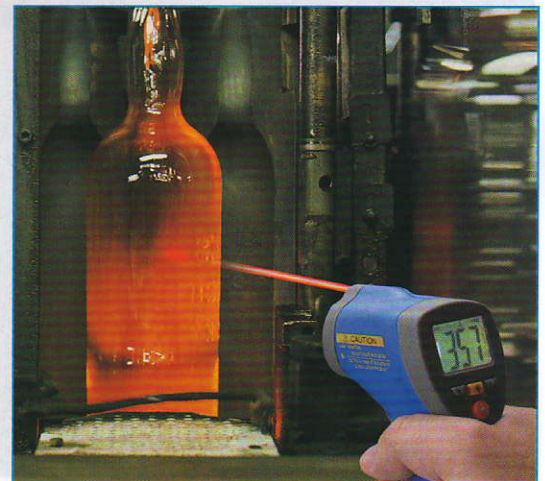

Accessories:  
9V battery, Carrying case and Gift box.

Size(HxWxD): 160mm x 82mm x 42mm  
Weight: 177g