

The Psychrometer with InfraRed Thermometer has been designed to combine the functions of Humidity meter, Type K Thermometer and Infrared Thermometer.

3 in 1

%RH, Type K & IR Temperature




EMC  
EN: 61326

Features	
Infrared to measure surface temperature	
Triple digital LCD display	
Slim design with rubberized sides for better grip and for one hand operation	
Low battery indication	
Fast response time	
Accurate reading	
Auto Power off	
Red laser indication	
Dual Display & Backlight	
Simultaneous display of: Humidity/Temperature; Humidity/Dew Point; Humidity/Wet Bulb	
Highest 30 to 1 distance to target ratio measures smaller surface areas at greater distances.	

Specifications			
Function	Range	Resolution	Accuracy
Type K Temperature	-100~1372°C(-148~2501°F)	0.01°C/°F	±3% ±0.20m/s
InfraRed Temperature	-50 to -20°C(-58 to -4°F)	0.1°C/°F	± 5.0°C(9.0°F)
	-20 to 500°C(-4 to 932°F)	0.1°C/°F	±2% reading or ±2°C(4°F)
Air Temperature	-10-60°C(14-140°F)	0.1°C/°F	± 2.0°C(4.0°F)
Humidity	0%~99.9%RH	0.1%RH	±2%RH
Dew Point Temp.	-30°C~100°C(-22°F~199°F)	0.1°C/°F	±0.5°C/0.9°F
Wet Bulb Temp.	0°C~80°C(32°F~176°F)	0.1°C/°F	±0.5°C/0.9°F



Model 8896

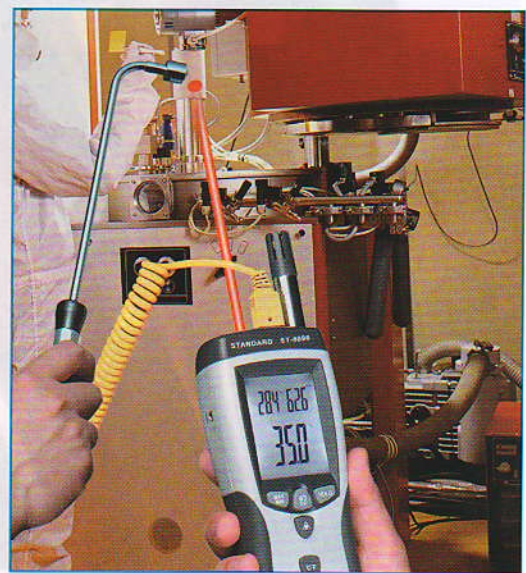

Size(HxWxD): 255mm x 75mm x 50mm  
Weight: 350g

Accessories :  
9V battery, type K temperature probe and gift box with carrying case.