

6 in 1 Digital Multimeter with Environment Measurement


- 61 is 6 in 1 multifunction multimeter, including DMM, sound level meter, light meter, humidity meter, temperature meter and Non-contact AC voltage detector
- Safety design meets CAT III 1000V and CAT IV 600V
- Infrared Probe for Non-contact Temperature measurement (Optional IR-82)
- Double Molded Housing
- 4000 Counts digital LCD display with backlight
- Auto ranging
- Data Hold and Relative function
- Auto Power Off

Applications

- Plant/General Maintenance
- HVAC/R
- Transportation/Automotive
- Cooling and Reheating
- Serving areas
- Food service Equipment
- Cold storage



DT-21 5 in 1 Digital Multimeter with Environment Measurement

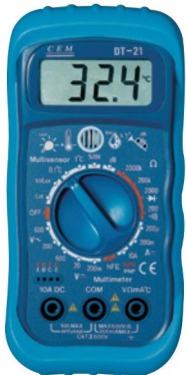

Model 21

21 digital Multifunction Environment Meter have been designed to combine the functions of Sound Level Meter, Light Meter, Humidity Meter, Temperature Meter and digital multimeter. They are ideal Multifunction Environment Instruments with scores of practical applications for professional and home use.



EMC & LVD

EN: 61326

EN: 61010-1, EN: 61010-02-031



Applications

- Plant/General Maintenance
- HVAC/R
- Transportation/Automotive
- Cooling and Reheating
- Serving areas
- Food service Equipment
- Cold storage

Specifications

Function	Max Range	Resolution	Basic Accuracy
Light	20,000Lux	0.1Lux	±0.5%±10d
Sound	100dB	0.1dB	±3.5dB
Humidity	95%RH	0.1%RH	±5%RH
Temperature	1300°C	0.1°C	±3%±1d
Voltage DC	600V	0.1mV	±0.5%±2d
Voltage AC	600V	10mV	±1.2%±10d
Current DC	10A	0.1uA	±1.0%±2d
Resistance	2MΩ	0.1Ω	±0.8%±2d

Size(HxWxD): 121mm x 60.6mm x 40mm


Weight: 280g

Accessories :

Rubber holster, 9V battery, Test leads and K-Type temperature probe.

DT-51/61

6 in 1 Digital Multimeter with Environment Measurement



Model 51



The model 61 is 6 in 1 Digital Multimeter with Environment Measurement. It has been designed to combine the functions of Sound Level Meter, Light Meter, Humidity Meter, Temperature Meter & Non-contact AC voltage detector.

The model 51 is without temperature (°F) range. They are ideal Multifunction Environment & DMM Instruments with scores of practical applications for professional and home use.

The Sound Level function can be used to measure noise in factories, schools, offices and home, etc, checking acoustics of studios, auditoriums and hi-fi installations.

The Light function is used to measure illuminance in the field. It is fully cosine corrected for the angular incidence of light. The light sensitive component used in the meter is a very stable, long life silicon diode. The Humidity/Temperature uses a humidity/semiconductor sensor and K type thermocouple.

The DMM function include ACV, DCV, ACA, DCA Resistance, Capacitance, Frequency, Duty Cycle, Diode, Continuity test and Non-contact AC voltage detector.



EMC & LVD

EN: 61326

EN: 61010-1, EN: 61010-02-031



Specifications

Function	Max Range	Max. Resolution	Basic Accuracy
Light	20,000 Lux	0.1 Lux	±5%±10d
	40,000 Lux		
Sound	100dB	0.1dB	±3.5dB
Humidity	95%RH	0.1%RH	±3.5%RH
Temperature	-20 ~ 750 °C	0.1° up to 400°, 1° over 400°	±3%±3°C
	-4 ~ 1400°F	0.1° up to 400°, 1° over 400°	±3%±5°F
NCV	50-1000V		
Voltage DC	600V	0.1mV	±0.5%±2d
Voltage AC	600V	0.1mV	±1.2%±10d
Current DC	10A	0.1uA	±1.0%±2d
Current AC	10A	0.1uA	±1.0%±2d
Resistance	40MΩ	0.1Ω	±0.8%±2d
Capacitance	100uF	0.01nF	±3.5%
Frequency	10MHz	0.001Hz	±1.5%
Duty Cycle	99.9%	0.1%	±1.2%
Diode Check	Open voltage 2.8VDC; Test current 1mA		
Continuity Test	Threshold 30Ω		

Size(HxWxD): 170mm x 79mm x 50mm

Weight: 342g

Accessories:

9V battery, Test leads and

K-Type temperature probe.

Infrared Temperature Probe (Option IR-82)

Model 61

