



Bluetooth



EMC
EN: 61326



Model 9501



9501 is with bluetooth function for data tranferring, analysis,editing, storage and sharing



The top of 9501 can be rotated and easily used for α , β , γ and X rays selection

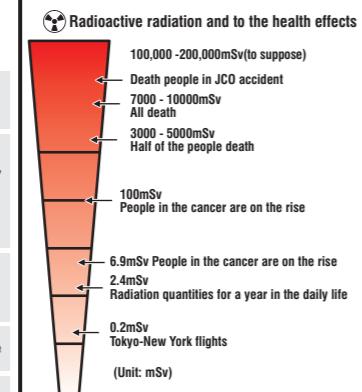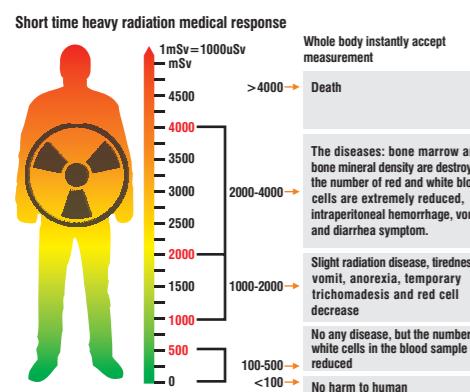

Size(HxWxD): 200mm x 70mm x 45mm
Weight: 206g

Accessories :
Software, Carrying case and Gift box.

DT-9501 Radiation scanner

9501 radiation scanner is a tested precision instrument, reliably measures not only γ rays, but α , β and X rays as well. It allows multifunctions such as dose accumulating, maximum recording, hand-operated store, data transfer to PC in real-time, data analysis etc. Low power consumption ensures that the testing data will be not lost for several years.

- Large LCD display
- High precision
- Internal memory
- Data evaluation by PC
- Low power consumption
- Bluetooth interface
- Date reset

Specifications

Ray types	α , β , γ and X rays
Range	Radiation dose rate: 0.01 μ Sv/h - 1000 μ Sv/h Impulse dose rate: 0-30,000cpm, 0-5,000cps
Sensitivity	108pcs impulse or 1000 cpm/mR/hr in Cobalt-60 radial environment with power of 1 μ Sv/h. Alpha ray: from 4 MeV Beta ray: from 0.2 MeV Gamma ray: from 0.02 MeV X ray: from 0.02 MeV
Ray selection switch	α , β , γ and X rays selection
Sensor	Halogen filled detector
Output port	Bluetooth
Display	Dual LCD display, numeric with all inspection data, with bar chart.
Alert	Can set alert value free, default set: 5 μ Sv/hr
Accuracy	Typical 15%
Storage	Can store 2000 data automatically or by manually
Detector working temperature	0°C to 50°C

Size(HxWxD): 200mm x 70mm x 45mm
Weight: 206g

Accessories :
Software, Carrying case and Gift box.

DT-900A 2 in1 HCHO & TVOC Meter


The HCHO Tester provides a real time measurement of HCHO and TVOC tech product to meet with a variety of occasions air pollution measurement needs, timely responds air pollution. This instrument has a high accuracy, fast response, sensitivity. It is compact, easy to carry, suitable and home, offices, factories, hotels and schools and other indoor environments. It can be displayed at any formaldehyde in the air and the concentration of TVOC, and calculate the value of API(Air Pollution Index).



EMC
EN: 61326



Model 900A

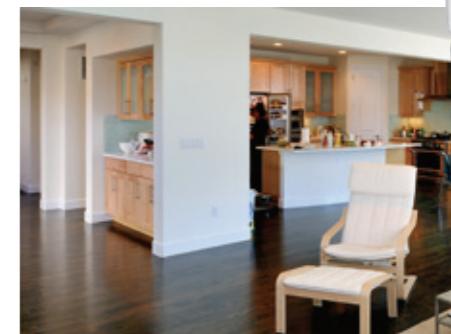

Features

Fuel Cell.HCHO sensor,high accuracy and reliability
LCD display with backlight
Real-time display the concentration of HCHO in the air
Real-time display the concentration of TVOC in the air
Real-time display the API
Sound and Light alarm when pollution
Auto power off

Specifications

HCHO	0.00 to 5.00mg/m ³
Range	0.01mg/m ³
Resolution	$\pm 2\%$
Repeatability accuracy	$\pm 2\%$
TVOC	0.00 to 9.99mg/m ³
Range	0.01mg/m ³
Resolution	$\pm 2\%$
Repeatability accuracy	$\pm 2\%$
Operation temperature range	0°C to 50°C
Storage temperature range	-10°C to 60°C
Working Voltage	7.4V(Rechargeable battery)

DT-2G Microwave Leakage Detector/DT-3G Magnetic Field Meter

The 2G is a high sensitive product to detect the microwave accurately, even at a low volume the injury of the radiation of microwave.

The 3G is capable of measuring the electromagnetic field radiation intensity that is produced from electric transmission equipment, power line, electric oven, air conditioner, refrigerator, computer monitor, video/audio device and so forth.

- Digital LCD display with white backlit
- Leakage volume in dangerous zone will sound beeping and a red lamp flashing(2G)
- Low leakage volume display for warning
- Max. hold function

Specifications

	2G	3G
Range	0- 9.99 mW/cm ²	200/2000mG,20/200 μ T
Warning values	5.0mW/cm ²	Frequency response: 30Hz-300Hz
Sample rate	2 times per second	2 times per second

Size(HxWxD): 160mm x 60mm x 42mm

Weight: 151g

Accessories:
9V battery and Gift box with carrying case.



Model 2G



Model 3G