



# GDM-8351

5 1/2 Digit Dual Measurement Multimeter

3 Year WARRANTY


## FEATURES

- 120,000 Counts, VFD Display
- Dual Measurement/Dual Display
- The Basic Precision of DC Voltage : 0.012%
- Selectable Measurement Speeds, the Maximum : 320 Readings/s
- True RMS (AC, AC+DC) Measurements
- Auto/Manual Selection
- 12 Different Measurement Functions : AC/DC Voltage, AC/DC Current, AC+DC Voltage/Current, 2W/4W Resistance, Continuity Beeper, Diode Test, Capacitance, Frequency, Temperature
- Many Auxiliary Functions : Max./Min., REL/REL#, Compare, Hold, dB, dBm, Math(MX+B, %, 1/X)
- Digital I/O Provides Dual Mode(Standard Compare and User Definition Modes)
- Standard RS-232C and USB Device Interface(Support USB CDC and USB TMC Modes)

**GW INSTEK**  
Simply Reliable

GW Instek presents the brand new 5 1/2 Digit Dual Measurement Multimeter-GDM-8351 to replace GDM-8251A of the same category. GDM-8351 features VFD dual-display, maximum 120,000 counts, 0.017% basic DC voltage accuracy and USB/RS232C connectors to provide users with measurement precision, lucid data observation, and the convenient connection with the personal computer. In addition to the fundamental measurement items such as AC/DC voltage, AC/DC current, AC+DC voltage/current, 2W/4W resistance, frequency, temperature measurement, continuity beeper and diode test, GDM-8351 also equips with the capacitance measurement function. Furthermore, the GDM-8351 also provides many auxiliary functions, including maximum/minimum values, dB, dBm, compare, reading hold, algorithms (MX-B, 1/X, %) etc. to meet the measurement requirements for manufacturing process tests, educational experiments and testing facilities. For the external control, the pin of digital I/O interface not only provides the signal output frequently used by the compare function, but also allows users to define signal output for each pin. Under the self-definition mode, users can apply the I/O as a simple digital hardware. The external control requirement can be achieved by signals from each pin so as to help users reduce trouble of making hardware. With respect to remote control and retrieving data, GDM-8351, taking consideration of users' habitual practice and universal system interface, provides standard RS-232C and USB interface to edit control programs and read measurement results. It is worth noting that for utilizing the USB interface, users have options of selecting either USB CDC or USB TMC mode. While USB TMC is selected, users are able to control instrument with the USB interface exactly the same as controlling instrument with the GPIB interface; therefore, the relatively expensive GPIB connection cable is no longer required.

## PANEL INTRODUCTION



1. VFD Dual Display
2. Measurement Function Keys
3. Auxiliary Function Keys
4. Arrow / Enter Keys
5. Measurement Terminal
6. Digital I/O
7. USB Device
8. RS-232C
9. Socket & Fuse Holder

## A. SELECTABLE MEASUREMENT SPEEDS



Displayed digits will not be decreased because of selecting different speeds

Function vs. Speed (no. k <sub>20</sub> )	Slow(S)	Medium(M)	Fast(F)
DCV/DCI/R	10	40	320
ACV/ACI	10	40	320
Continuity/Beeper/Diode	10	40	320
Frequency/Period	1	5.8	83
Temperature	10	40	320
Capacitance	2	2	2

GDM-8351 has fastest measurement speed among the same category products and three selectable measurement speeds are available - slow/medium/fast. For instance, the DC voltage

measurement can reach 320 readings per second on the fast mode, which can maximize the effectiveness of each measurement.

## B. DUAL MEASUREMENT/DUAL DISPLAY



GDM-8351, similar to GW Instek 6 1/2 and 5 1/2 digit multimeters, equips with VFD dual display to support the possible combinations of measurement items. For example, the DC voltage and current or DC voltage with AC element will appear when monitoring

	ACV	DCV	ACI	DCI	Freq.	R
ACV	✓	✓	✓	✓	✓	-
DCV	✓	✓	✓	✓	-	-
ACI	✓	✓	✓	✓	✓	-
DCI	✓	✓	✓	✓	-	-
Freq.	✓	-	✓	-	✓	-
R	-	-	-	-	-	✓

components of test wiring. The results of each measurement will simultaneously appear on different displays that not only save users' precious time but also exempt users from the trouble of selecting displays while reading measurement results.

## C. VARIOUS MEASUREMENT ITEMS AND FUNCTIONALITIES



GDM-8351 provides various measurement items and functionalities compared with that of the products of same category. There are twelve major measurement items of GDM-8351, including AC voltage/current, DC voltage/current, AC+DC voltage/current, two-wired and four-wired resistance, temperature, frequency, diode

Auxiliary Functions	MAJOR MEASUREMENT ITEMS						
	V	I	R	H <sub>z</sub> /P	Temp <sup>o</sup>	Diode	Capa.
dB	✓	-	-	-	-	-	-
dBm	✓	-	-	-	-	-	-
Max/Min	✓	✓	✓	✓	✓	-	✓
Relative	✓	✓	✓	✓	✓	-	✓
Hold	✓	✓	✓	✓	✓	-	✓
Compare	✓	✓	✓	✓	✓	-	✓
Math	✓	✓	✓	✓	✓	-	-

and continuity beeper test, and even the capability of measuring capacitance. Many auxiliary functions, such as maximum/minimum values, reading hold, relative values, dB, dBm, algorithms (MxI, IxM, IxI, IxI), and compare, are designed to reinforce the major measurement items to satisfy users' daily working requirements.


## D. CONVENIENT DIGITAL I/O FUNCTION



H.F	LF	PASS	EDM	TRIG IN	GND
SET1	SET2	SET3	SET4		

Another difference, while comparing with GDM-8251A, is that the Digital I/O of GDM-8351 provides two different modes which are general and self-definition. With the general mode, Digital I/O will output Hi Fail, Lo Fail, Pass and EDM (measurement results) based upon the results of the compare function and, furthermore, external trigger input is also provided. Under the self-definition mode, users can define output conditions for four pins (SET1-SET4) to execute the external control.

## E. FREE SOFTWARE-REMOTE CONTROL AND DATA RETRIEVING

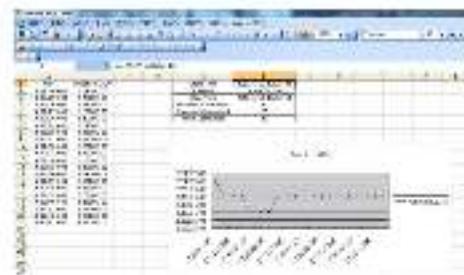

GDM-8351 provides free software-Excel AddIns for users' easy access. After installing the software, Microsoft Excel will establish Macro for users to directly control the setting of GDM-8351 to record the results of the measurements. The recorded data will be synchronously transformed into graphic displays via Excel drawing function that not only eliminates the cost and time of developing programs but also overcomes the compatibility issue of different programming languages.

## F. COMMAND COMPATIBILITY

For GDM-8251A users, GDM-8351 also provides compatible commands. Users can replace machines through the simple setting of GDM-8351 without worrying the extra cost to modify the existing program and the delay of production time.

## SPECIFICATIONS (1)

Range(1)	Resolution	Test Current or etc.	Accuracy(2) 1 Year(23°C±5°C)
<b>DC VOLTAGE</b>			
100.000mV	1.0V	10MΩ or >10GΩ	0.012 + 5
1.00000V	100μV	10MΩ or >10GΩ	0.012 + 5
10.0000V	100.0V	11.1MΩ	0.012 + 5
100.000V	1mV	10.1MΩ	0.012 + 5
1000.00V	10mV	10VΩ	0.012 + 5
<b>RESISTANCE</b>			
100.000Ω	1mΩ	1mA	0.05 + 8
1.00000kΩ	10mΩ	1mA	0.05 + 5
10.0000kΩ	100mΩ	100μA	0.05 + 5
100.000kΩ	1Ω	10μA	0.05 + 5
1.00000MΩ	10Ω	1μA	0.05 + 5
10.0000MΩ	100Ω	0.5μA	0.02 + 5
100.000MΩ	1kΩ	0.5μA / 10MΩ	0.00 + 8
<b>DC CURRENT</b>			
10.0000mA	100.0A	1Ω	0.05 + 15
100.000mA	1.0A	1Ω	0.05 + 5
1.00000A	100μA	0.1Ω	0.00 + 5
10.0000A	100.0A	0.01Ω	0.00 + 5
<b>CONTINUITY</b>			
1000.00Ω	10mΩ	1mA	0.00 + 5
<b>DIODE TEST</b>			
6.0000V	100.0V	1mA@60V	0.05 + 15
<b>CAPACITANCE</b>			
10.00nF	0.01nF	10pA	2.0 + 10
100.0nF	0.1nF	10pA	2.0 + 4
1.000μF	0.001μF	100μA	2.0 + 4
10.00μF	0.01μF	1mA	2.0 + 4
100.0μF	0.1μF	1mA	2.0 + 4

### General

Display	VFD, Two Colors Display
Interface	RS-232C, USB device (USB CDC & USB VCI)
Power Source	AC 100V / 200V / 250V / 240V ±10%, 50/60Hz Power Consumption Max. 15VA
Dimensions & Weight	365(W) x 107(H) x 50(D) mm, approx. 2.5kg

### Note

- All specifications are applicable to the main (1) digit display only and warm up for at least 30 minutes and measured in the slow rate.
- 20% overrange on all ranges, except 750V/10A range.
- Accuracy = (% of Reading + Digit)

Range(1)	Resolution	Frequency or etc.	Accuracy 1 Year(23°C±5°C)
<b>True RMS AC (or AC+DC – AC Coupled) Voltage</b>			
100.00mV	1.0V	20Hz – 45Hz 45Hz – 10kHz 10kHz – 50kHz 20kHz – 100kHz	1.0 – 100 0.3 – 100 1.5 – 300 5.0 – 300
1.0000V	10.0V	20Hz – 45Hz 45Hz – 10kHz 10kHz – 50kHz 20kHz – 100kHz	1.0 – 100 0.2 – 100 1.0 – 100 5.0 – 200
10.000V	0.01V	20Hz – 45Hz 45Hz – 10kHz 10kHz – 50kHz 20kHz – 100kHz	1.0 – 100 0.2 – 100 1.0 – 100 3.0 – 200
100.00V	1mV	20Hz – 45Hz 45Hz – 10kHz 10kHz – 50kHz 20kHz – 100kHz	1.0 – 100 0.2 – 100 1.0 – 100 3.0 – 200
750.00V	10mV	20Hz – 45Hz 45Hz – 10kHz 10kHz – 50kHz 20kHz – 100kHz	1.0 – 100 0.2 – 100 1.0 – 100 3.0 – 200
<b>True RMS AC (or AC+DC – AC Coupled) Current</b>			
10.000mA	100nA	20Hz – 45Hz 45Hz – 2kHz 2kHz – 10kHz	1.5 – 100 0.5 – 100 2.0 – 200
100.000mA	1.0μA	20Hz – 45Hz 45Hz – 2kHz 2kHz – 10kHz	1.5 – 100 0.5 – 100 2.0 – 200
1.00000A	10.0nA	20Hz – 45Hz 45Hz – 2kHz 2kHz – 10kHz	1.5 – 100 0.5 – 100 2.0 – 200
10.0000A	100pA	20Hz – 45Hz 45Hz – 2kHz 2kHz – 10kHz	1.5 – 100 1.0 – 100
<b>FREQUENCY</b>			
(Voltage) 10Hz – 1MHz	.....	.....	0.01 + 3
(Current) 20Hz – 10kHz	.....	.....	0.01 + 3
<b>TEMPERATURE (THERMOCOUPLE)</b>			
200°C – 0°C	0.01°C	„/T / K	0.4°C (typical)
0°C – -200°C	0.01°C	„/T / K	0.2°C (typical)

Specifications subject to change without notice

DM-8351-G015H

## ORDERING INFORMATION

**GDM-8351** 5 1/2 Digit Dual Measurement Multimeter

## ACCESSORIES

- Safety Instruction Sheets (1)
- Power cord (1)
- Accessories CD-ROM (1)
- CD-ROM (Including complete user manual, driver and software)

## OPTIONAL ACCESSORIES

- GTL1084 4-Wire Test Lead (Kuhin Clia), Approx. 1100mm
- GTL200 Temperature probe adapter with thermocouple (K type), Approx. 1000mm
- GII-P10 RS-232C Cable, 9-pin female to 9-pin, full modem for computer, Approx. 2000mm
- GII-P16 USB Cable, A-B type, Approx. 1200mm
- GRA-422 Basic Adapter Panel (10" 2U)

### Global Headquarters

**GOOD WILL INSTRUMENT CO., LTD.**  
No. 71, Zhongxing Road, Taichung Dist., New Taipei City 241, Taiwan  
T +886 2 2662 5028 F +886 2 2665 0414  
E-mail: [marketing@goodwill.com.tw](mailto:marketing@goodwill.com.tw)

### China Subsidiary

**GOOD WILL INSTRUMENT (SUZHOU) CO., LTD.**  
No. 521, Zhongxing Road, and Suzhou Foreign Trade City, China  
T +86 512 5255 1777 F +86 512 4991 1277  
E-mail: [marketing@goodwill.com.cn](mailto:marketing@goodwill.com.cn)

### Malaysia Subsidiary

**GOOD WILL INSTRUMENT (M) SDN. BHD.**  
27, Persiaran Mahkota 121, Simeida, Lulus  
119A00000, Putrajaya, Malaysia  
T +604 65029788 F +604 65029787  
E-mail: [info@goodwill.com.my](mailto:info@goodwill.com.my)

### Europe Subsidiary

**GOOD WILL INSTRUMENT EURO B.V.**  
De Ruyter 34/35, 5514AC, Nijmegen, THE NETHERLANDS  
T +31 030 2557750 F +31 030 456 354 191

### U.S.A. Subsidiary

**INSTEK AMERICA CORP.**  
5198 Brooker Street, Montclair, CA 91703, U.S.A.  
T +1 909 399 4733 F +1 909 399 0513  
E-mail: [sales@instekamerica.com](mailto:sales@instekamerica.com)

### Japan Subsidiary

**TEXIO TECHNOLOGY CORPORATION.**  
2F, Tezuka Building, 5-1-1, Yokohama Bldg., 2-15-15 Shin  
Yokohama, Kohoku-ku., Yokohama, Kanagawa.  
222-0003 Japan  
E-mail: [info@instek.jp](mailto:info@instek.jp)  
E-mail: [info@instek.co.jp](mailto:info@instek.co.jp)

### Korea Subsidiary

**GOOD WILL INSTRUMENT KOREA CO., LTD.**  
41-404, A-1, Giljeong City B/D, 10, 5-gil,  
Seodaemun-gu, Seoul, 152-800, Korea  
T +82 2 3419 2275 F +82 2 3419 2287  
E-mail: [info@instek.com](mailto:info@instek.com)

**GW INSTEK**

Simply Reliable



[www.gwinstek.com](http://www.gwinstek.com)

[www.facebook.com/GWInstek](http://www.facebook.com/GWInstek)