


EARTH RESISTANCE TESTER MS2302

MS2302

RESISTANCE
0.01~4000Ω


VOLTAGE
0~300V

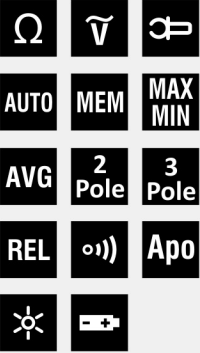


EMC
LVD



◆ Test Connection Diagram
(2 Pole)

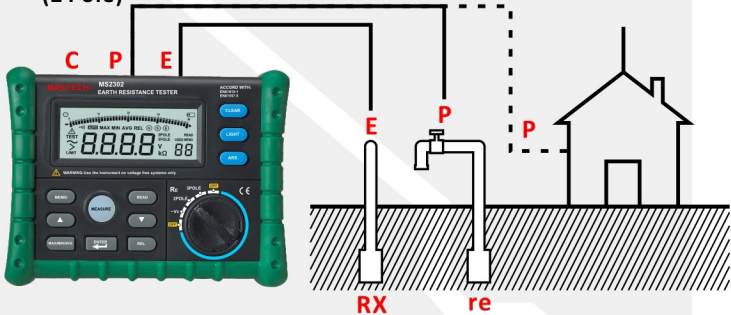

◆ Connect the test leads to the meter as follows
(3 Pole)

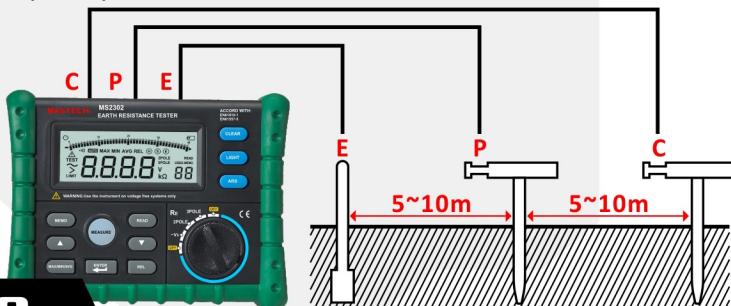

Specifications

MS2302

Specifications	Range	Resolution	Accuracy
Earth Ground Resistance	0~29.99Ω	0.01Ω	±(2%+6)
	30~99.9Ω	0.1 Ω	±(3%+3)
	100~999Ω	1 Ω	±(3%+3)
	1.00~4.00kΩ	10 Ω	±(3%+3)
Measuring Voltage to Earth	0~200V (50Hz~60Hz)	0.1V	±(1%+5)
Features			
Auto Ranging	Auto and Manual		●
APO	Auto Power Off		●
Segments Bar Graph			●
MAX/MIN/AVG			●
Continuity Test			●
REL	Relative Measurement		●
Data Logging	99 groups		●
Display Backlight			●
LBD	Low Battery Display		●
General			
Power Supply	6×1.5V AA Batteries		
Product Size	330mm×265mm×125mm/13"×10.4"×4.9"		
Product Weight	3.45kg/7.6lb		
Safety Rating	CE ETL CAT III 300V		