

ST-125H/125G

Moisture Meters

St

125H/125G series moisture meters are used for testing moisture in wood, plaster and building materials. Integrated characteristics for 8 material groups increase the accuracy of measurements. The wet/dry indicator evaluates and interprets measurements with respect to the given material. The clearly organised, functional display and rubber guard around the housing make this unit well-suited for use in the rough professional environment. 125G can meet with different measuring requirements with various professional remote probes.



EMC
EN: 61326

Features

- Large LCD display
- Readings with Moisture Probe or Hammer Electrode
- Readings with Integral electrode Pins

Specifications

Model	125H	125G
Electrode length	8 mm	
Electrodes	Integrated, replaceable	
Measuring range Wood:	1 - 75 %	
Measuring range	Wood: 1 - 75 %	
	Building material: 0.1 - 2.4 %	
Accuracy	Ambient temperature: -40 to 70°C (-40 to 158°F)	
	Ambient Relative Humidity: 0 to 100%	
	Wood: 0...30% / ±1 %	
	30...60% / ±2%	
Ambient temperature	-40 °C ~ -10°C and +40 ~ +70°C / ±2°C	
	-10 °C ~ +40°C / ±1°C	
Ambient Relative Humidity	0-20% and 80-100% / ±5.0%	
	20-80%/±3.5%	
Auto power OFF	After approx. 3 minutes	
Auto LCD backlight OFF	After approx 10 seconds	
Housing material	Impact-proof plastic housing	
Ambient temperature	0 - 40°C	
Ambient Relative humidity	0 - 85 %RH	
Professional remote probes	No	Yes


Size(HxWxD): 160mm x 60mm x 28mm

Weight: 203g

Accessories :

3xCR2032 button batteries, Moisture Hammer Probe, Moisture Baseboard Probe, Moisture Probe Extenders, gift box and carrying case (125G)

3 x CR2032 button batteries (125H)

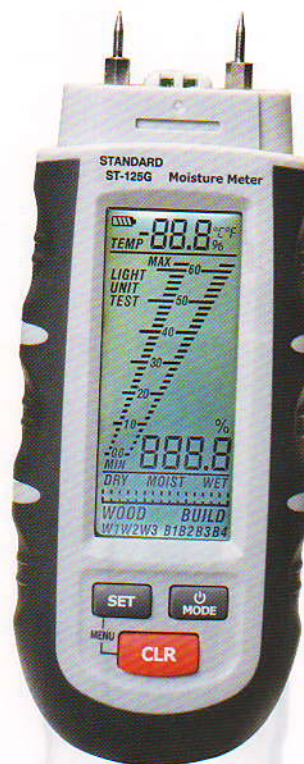

Model 125G



ST-120 Pocket Moisture Meter

Features

- Dual backlit LCD digital display of moisture & temperature
- Readings with Integral electrode Pins
- User selectable Wood moisture, Building material moisture, °C, °F
- Auto power off

Specifications

Electrode length	8 mm
Measuring range	Wood: 6 - 44%
	Building material: 0.2 - 2.0%
Accuracy	Ambient temperature: 0 to 50°C (32 to 122°F)
	Wood: ±2 %
Ambient temperature	materials: ±0.2%
	±1°C / ±1.8°F
Auto power OFF	After approx. 3 minutes
Ambient temperature	0 - 40°C
Ambient Relative humidity	0 - 85 %RH

Size(HxWxD): 96mm x 40mm x 20mm

Weight: 83g

Accessories :

4xLR44 button batteries, gift box and carrying case

