


# Professional True RMS Industrial Multimeter / Oscilloscope with TFT color LCD display

## Features

- 10MHz oscilloscope
- 50,000 count, 0.025% accuracy
- Fast response, 20 times/sec
- 100kHz AC bandwidth
- Fully PC Calibration
- Bluetooth interface
- IP67 dust and waterproof
- CATIII 1000V/CATIV 600V



EMC & LVD  
EN: 61326  
EN: 61010-1 EN: 61010-2-031

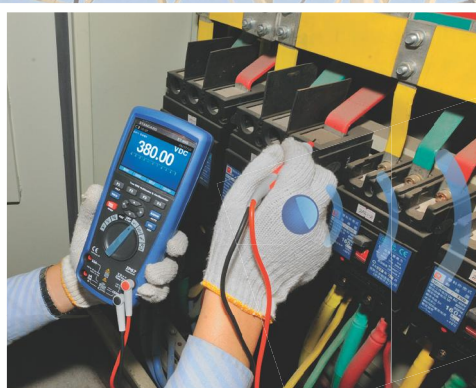

ST-9989

Professional True RMS Industrial Multimeter / Oscilloscope with TFT color LCD display

St



Worldwide Patent:  
PCT/CN2012/082191

9989 Professional True RMS Industrial Digital Multimeter with oscilloscope functions and TFT color LCD display, providing fast A/D converting sampling time, high accuracy, built-in datalogging and Trend Capture features.

Meterbox IMM software & cloud server support to transfer the measured data to the customer's smartphone for edit and storage.

- TFT color LCD display
- 50000 counts
- PC Calibration

Model 9989

- IP67 dust and water proof
- True RMS

Safety Conformance

- EN61010-1 CAT IV 600V, CAT III 1000V
- 1000V input protection on all ranges
- 10A/1000V & 0.8A/1000V fuses protection on current ranges



EMC & LVD  
EN: 61326  
EN: 61010-1, EN: 61010-02-031



Made for  
iPod iPhone iPad



Features

- Large 50,000 count 320 x 240 TFT color LCD display
- 10MHz/50MS/s bandwidth/Real time sample rate
- Logging function with Trend Capture for easy review of logged data
- Bluetooth PC interface for easy data transfer & accuracy calibration
- 100kHz bandwidth (voltage/current)
- AC, AC+DC true-RMS measurements
- 0.025% DCV accuracy with Fully PC Calibration
- Saves measurements, records events and trends
- 20 Times/sec. A/D convert fast sampling time
- Peak capture (records transients as fast as 250µs)
- Min/Max/Average with Time stamp (records signal fluctuations)
- Moto winding and low ohm (50Ω) measurement range
- Low pass filter
- IP Rating 67 & CATIII 1000V/CATIV 600V
- Bluetooth interface to smartphone / PC.
- Meterbox IMM & cloud service


Specifications

Oscilloscope Functions			
Display Size	3.5" color LCD; 320 x 240 pixels		
Bandwidth	20MHz		
Real time sample rate	100MS/s		
Risetime	10ns		
Channels	1		
Vertical Sensitivity	50mV/div to 200V/div		
Vertical Resolution	8 bits		
Trigger Mode	Free Run, falling edge, rising edge		
Trigger Source	Internal		
Trigger Coupling	AC/DC		
Input impedance	1MΩ/15pF		
Max Input Volatage	1000Vp-p		
Cursor Measurement	Voltage and time/ Frequency		
True RMS Multimeter Functions			
Function	Maximum	Max, resolution	Accuracy
Voltage DC	1000V	1µV	±(0.025% + 5)
Voltage AC	1000V	1µV	±(0.4% + 40)
Current DC	10A	0.01µA	±(0.15% + 2)
Current AC	10A	0.01µA	±(0.6% + 5)
Temperature	-200°C to 1350°C	0.1°C	±(1.0% + 2.5°C)
Resistance	50MΩ	0.01Ω	±(0.05% + 2)
Capacitance	10mF	0.001nF	±(1.0% + 5)
Frequency	10MHz	0.01Hz	±(0.005% + 1)
Diode and Continuity	Yes		
PC Interface	Bluetooth		
Power Supply	6 hours Li-ion rechargeable battery; AC Adaptor/charger		

Size(HxWxD): 220mm x 96mm x 60mm Weight: 631g

Accessories:

Test leads, Li-ion batteries, Type K temperature probe, Bluetooth and Software, gift box with carrying case.



10MHz Oscilloscope Function




Fast response time




High Resolution & Accuracy



Multifunction Selectable



Trend Capture function



Help Menu